

DS-PDD12P-EG2 Detector PIR cableado interior 12 m



La serie DS-PDD12-EG2 de detectores de doble tecnología está equipada con microondas de banda K de 24 GHz y tecnología de lente Fresnel 3D. Tecnología sin interferencias que permite una instalación espalda con espalda y sin penetración a través de la pared. Permite que el detector se instale y configure más rápido que los DT tradicionales, lo que brinda ventajas de ahorro de tiempo y costos al instalador.

- Rango de detección: 12 m / 85,9°
- Hasta 30 kg de inmunidad pey
- Sensibilidad automática
- Compensación digital de temperatura
- 52 zonas de óptica 3D, incluida la protección de zona de fluencia, cobertura total sin ángulo muerto
- resistencias EOL seleccionables para alarma y cableado a prueba de manipulaciones
- Óptica sellada que evita la interferencia de insectos
- Microondas 24Ghz
- Adaptación de voltaje amplio de 9 a 16 V con protección de conexión inversa de polaridad
- Soportes de montaje en pared/techo disponibles (se venden por separado)
La tecnología IFT previene falsas alarmas



▪ Aprobaciones

EN Grade 2
CE
FCC
CB
CCC
IC
RCM




▪ Especificaciones


Performance de deteccion	
Detection Method	Passive Infrared,Microwave
Detection Range	12m
Detection Angle	85.9°
Detection Zones	52
Detectable Speed	0.3 ~ 2m/s
Sensitivity	Auto,Pet
Pet Immunity	30Kg
White Light Filter	6500lux
Microwave Frequency	24GHz(24.15 ~ 24.25GHz)
Digital Temperature Compensation	Support
Creep Zone Protection	Support
Feature	
Digital Processing	Support
Sealed Optics	Support
Tamper Protection	Front
Interface	
Alarm Output	Normally Closed
LED Indicator	Green(PIR), Orange(Microwave), Blue(Alarm)
Transmission	
Transmission Method	Cableado
Electrical Characteristics	
Power Supply	9 to 16 VDC
Typical Voltage	12 VDC
Power Consumption	17mA Max
General	
Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Operation Humidity	10% to 90%
Dimension(WxHxD)	65.7 mm (2.59 ") × 103.8 mm (4.09 ") × 45.5 mm (1.79 ")
Weight	99g (3.5 oz)
Mounting Height	1.8 m to 2.4 m
Mounting Method	Wall
Application Scenario	Indoor
Bracket	Optional wall & ceiling accessory

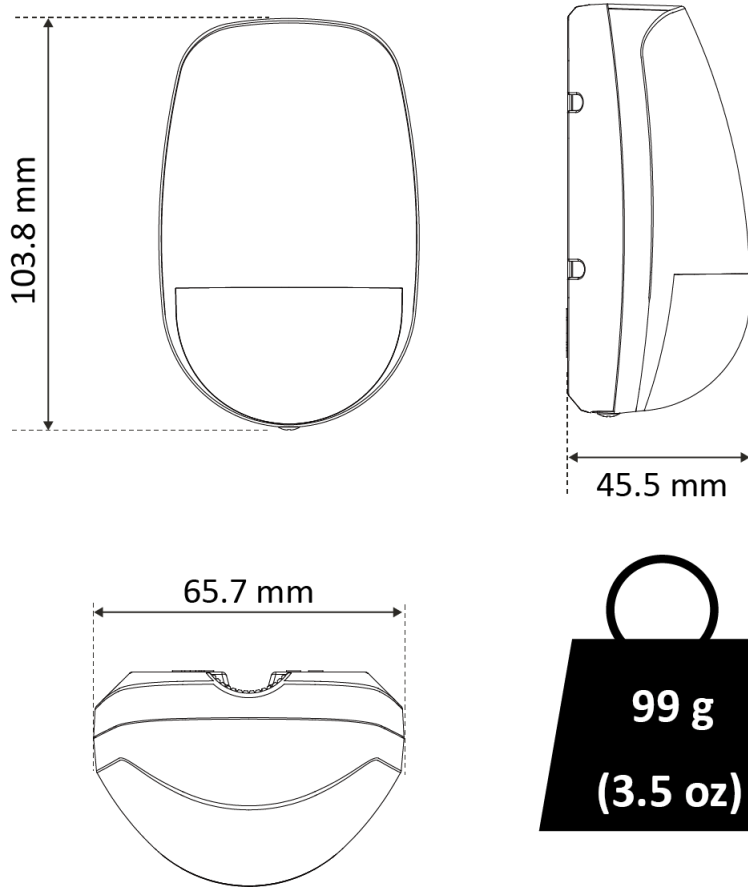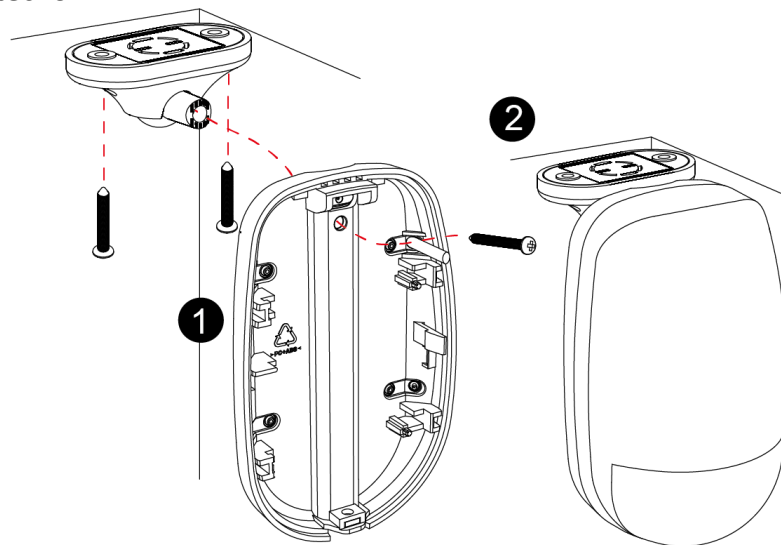▪ Dimensiones**▪ Instalacion****Ajuste del soporte de techo**



Ajuste del soporte de pared

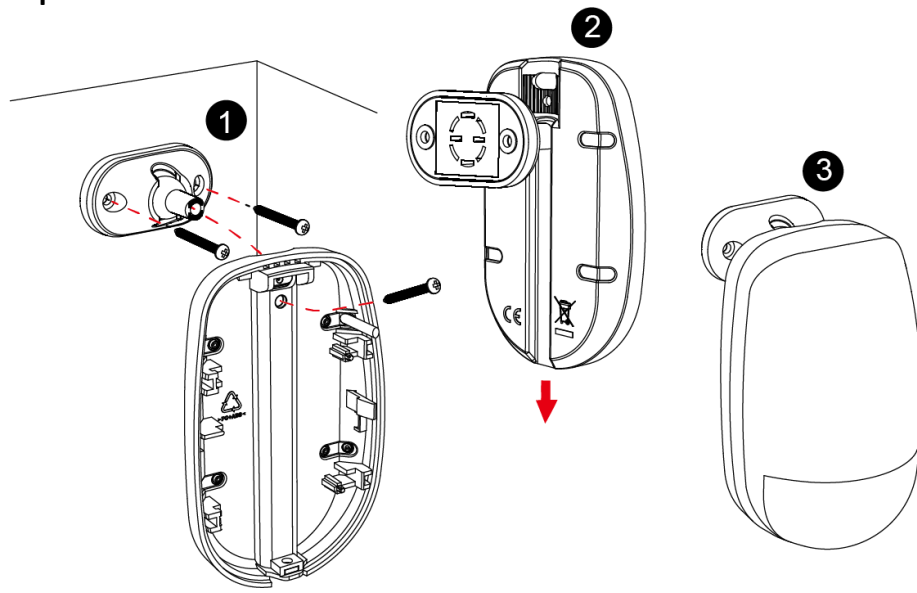

▪ Rango de detección



Detection Range
 85.9°
 52 zones
 4 planes

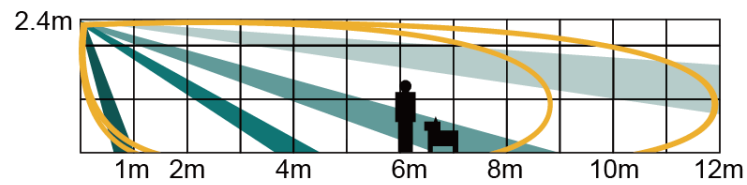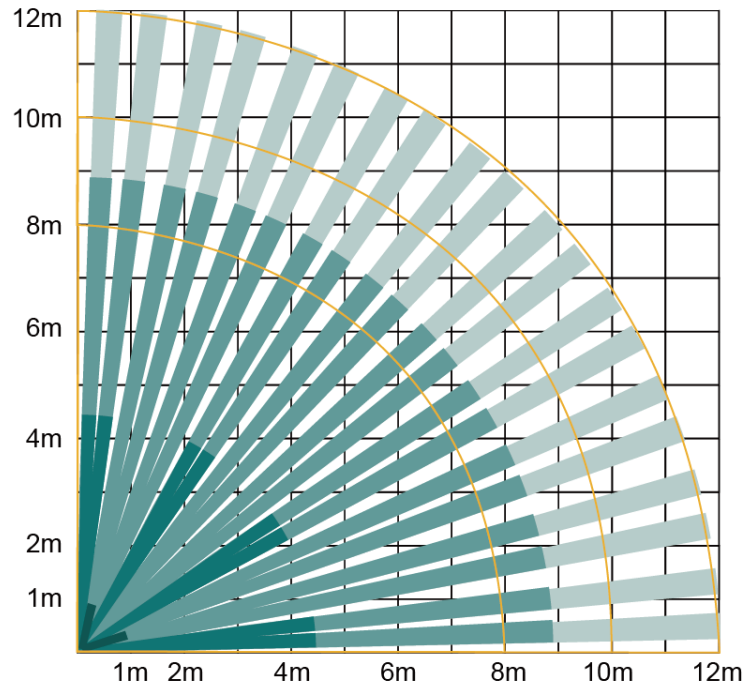

Microwave Range Control



Max: 11 to 12 m



Medium: 2 to 11 m



Min: 0 to 2 m

▪ **Accesorios**
▪ **Opcionales**

DS-PDB-IN-Wallbracket Internal ceiling mounted bracket	DS-PDB-IN-Ceilin gbracket Internal wall mounted bracket	DS-PDB-IN-Universalbracket Internal universal bracket
		

▪ **Model**

DS-PDD12P-EG2

Distributed by

✉ ventas@rosarioseguridad.com.ar

☎ +54 9 341 6708000

☎ +54 9 341 6799822

📷 [rosarioseguridadok](#)

📺 Rosario Seguridad

📘 Rosario Seguridad

Grupo Instaladores

📘 <https://www.facebook.com/groups/591852618012744/>

☎ +54 9 341 6591429

☎ +54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com