

HIKVISION®



BETTER VISION
FOR BETTER SECURITY
HIKVISION MONITORS



Hikvision's incredibly durable Monitors are specially designed for security and control center environments. Featuring industry-grade panels, professional displays, and sharp, brilliant image clarity, these are ideal monitors for every critical monitoring need – 24 hours a day, 7 days a week.

FEATURES

4K Ultra HD display

The high-definition monitors present clearer images with more details, and lifelike viewing experience for the users. When combined with 4K cameras, the 4K monitors can greatly enhance the performance of the entire surveillance system.



Longer Life Span for Critical Performance and Minimum TCO




Panel life of Hikvision monitors
 50,000 – 60,000 Hours



Panel life of normal monitors
 20,000 – 25,000 Hours


Perfect Integration and Compatibility with DVRs & NVRs

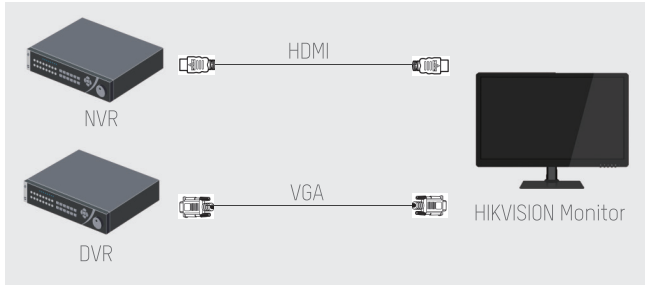

On Duty 24/7 for Mission Critical Applications



Original Modular Panel

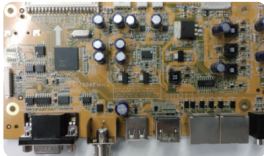

Professional Display Board



Professional Power Board




Wide Viewing Angle for Flexible Monitor Positioning

Viewing Angles

- Multiple monitoring angles



Flexible Monitoring Angles

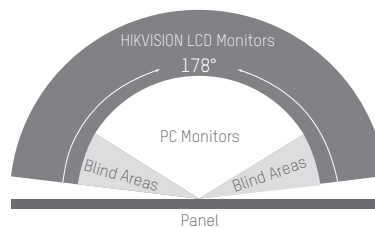

Viewing Angle Comparison

Various Interfaces making it more convenient and powerful

Multiple Interfaces

Supports HDMI, DVI, VGA, BNC, USB, and Audio input

USB Media Play

Supports playing videos through USB drive

Built in Speaker

Supports audio playing

RS232 Control

Supports turning the monitor on/off through RS232



Professional, User-Friendly Design



Metal Casing



Standard VESA compliance




Plastic Casing







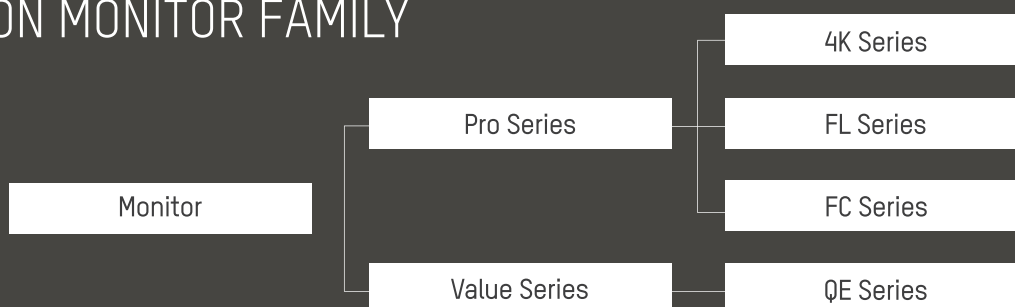

Base with -5 to +10-degree angle adjustment for flexible monitoring







HIKVISION MONITOR FAMILY








Pro Series: 4K Series

Models	DS-D5028UC	DS-D5043UC	DS-D5050UC	DS-D5055UL-B	DS-D5055UC	DS-D5065UC
	HOT	HOT	COMING SOON		COMING SOON	COMING SOON
Image						
Bezel Material	Plastic	Plastic	Plastic	Metal	Plastic	Plastic
Display						
Max Resolution	3840x2160	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160	3840 × 2160
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	28"	43"	55"	55"	55"	65"
Brightness	300 cd/m ²	350 cd/m ² (typ)	300 cd/m ²	500 cd/m ²	350 cd/m ² (typ)	450 cd/m ² (typ)
Contrast Ratio	1000: 1	1200: 1	4000: 1	1400:1	1200: 1	1200: 1
Response Time	5.5 ms	8 ms	8 ms	8 ms	8 ms	8 ms
Viewing Angle	Horizontal 170°, vertical 160°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°
Interface						
HDMI Input	1	2	1	1	2	2
VGA Input	1	1	1	1	1	1
DP Input	1	-	-	-	-	-
DVI Input	-	-	-	1	-	-
USB	-	USB2.0*1, USB3.0*1	2	1	USB2.0*1, USB3.0*1	USB2.0*1, USB3.0*1
Audio	Support	Audio In *1 Audio Out *1 Internal Speaker 8W*2	Support	Support	Audio In *1 Audio Out *1 Internal Speaker 8W*2	Audio In *1 Audio Out *1 Internal Speaker 8W*2
RS232	-	1(RJ45 interface)	-	-	1(RJ45 interface)	1(RJ45 interface)
Genera						
VESA Mounting	100 × 100 mm	400mm*400mm	400 × 200 mm	400mm x 400mm	200mm*400mm 400mm*400mm	400mm*400mm





Pro Series: FL Series

Models	DS-D5032FL	DS-D5032FL-B	DS-D5032FL-C	DS-D5043FL	DS-D5049FL	DS-D5055FL
Image						
Bezel Material	Metal	Metal	Metal	Metal	Metal	Metal
Display						
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	32"	32"	31.5"	42"	49"	55"
Brightness	400 cd/m ²	400 cd/m ²	400 cd/m ²	400 cd/m ²	450 cd/m ²	380 cd/m ²
Contrast Ratio	4000:1	3000:1	3000:1	1200:1	1100:1	1200:1
Response Time	6.5 ms	6.5 ms	6.5 ms	8 ms	12 ms	8 ms
Viewing Angle	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°
Interface						
HDMI Input	1	1	1	1	1	1
VGA Input	1	1	1	1	1	1
DVI Input	1	-	-	1	1	1
BNC Input	1	1	-	1	1	1
USB	1	1	1	1	1	1
BNC Output	-	1	-	-	-	-
Audio	Support	Support	Support	Support	Support	Support
Genera						
VESA Mounting	200mm×200mm	200mm × 200mm	200mm × 200mm	Not comply VESA 394mm x 307mm	300mm x 200mm	400mm x 300mm

Pro Series: FC Series

Models	DS-D5022FC	DS-D5024FC	DS-D5032FC-A	DS-D5040FC	DS-D5043FC
Image	 HOT	 HOT		 HOT	
Bezel Material	Plastic	Plastic	Plastic	Plastic	Plastic
Display					
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080
Backlight	LED-Backlit TFT LCD	LED-Backlit	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	21.5"	23.6"	31.5"	39.5"	42.5"
Brightness	250 cd/m ²	250 cd/m ²	300 cd/m ²	360 cd/m ²	260 cd/m ²
Contrast Ratio	1000:1	1000:1	1000:1	3000:1	1200:1
Response Time	5 ms	5 ms	8 ms	9.5 ms	8 ms
Viewing Angle	Horizontal 170°, Vertical 160°	Horizontal 170°, Vertical 160°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°
Interface					
HDMI Input	1	1	1	1	1
VGA Input	1	1	1	1	1
DVI Input	-	-	1	1	1
BNC Input	1	1	1	1	1
USB	1	-	-	1	-
BNC Output	1	1	1	1	-
Audio	Support	Support	Support	Support	Support
Genera					
VESA Mounting	100mm × 100mm	100mm × 100mm	100 mm × 100 mm	100 mm × 100 mm	300mm x 200mm

Value Series: QE Series

Models	DS-D5019QE	DS-D5019QE-B	DS-D5022QE-B	DS-D5022QE-E	DS-D5024QE	DS-D5027QE	DS-D5032QE	DS-D5032QE-B	DS-D5043QE
Image		 HOT	 HOT	 NEW	 NEW	 NEW	 COMING SOON	 COMING SOON	 COMING SOON
Bezel Material	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Plastic	Matal/Plastic	Plastic
Display									
Max Resolution	1366×768	1366×768	1920×1080	1920×1080	1920×1080	1920×1080	1920×1080	1920*1080	1920*1080
Backlight	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD	LED-Backlit TFT LCD
Active Display Area	18.5"	18.5"	21.5"	21.5"	23.8"	27"	32"	31.5"	42.51"
Brightness	200 cd/m ²	200 cd/m ²	250 cd/m ²	200 cd/m ²	250 cd/m ²	250 cd/m ²	300cd/m ² (typ)	350 cd/m ² (typ)	260 cd/m ² (typ)
Contrast Ratio	600:1	600:1	1000:1	600:1	1000:1	1000:1	1200: 1	1400: 1	1200: 1
Response Time	5 ms	5 ms	5 ms	5 ms	14 ms	14 ms	8 ms	6ms	9ms
Viewing Angle	Horizontal 90°, Vertical 65°	Horizontal 90°, Vertical 65°	Horizontal 170°, Vertical 160°	Horizontal 90°, Vertical 65°	Horizontal 178°, Vertical 178°	Horizontal 178°, Vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°	Horizontal 178°, vertical 178°
Interface									
HDMI Input	-	1	1	1	1	1	1	1	3
VGA Input	1	1	1	1	1	1	1	1	1
DP Input	-	-	-	-	-	-	-	-	-
DVI Input	-	-	-	-	-	-	-	1	-
BNC Input	-	-	-	-	-	-	-	-	1
USB	-	-	-	-	-	-	-	-	2
BNC Output	-	-	-	-	-	-	-	-	-
RS232	-	-	-	-	-	-	1(RJ45 interface)	-	-
Audio	-	-	-	-	-	-	Internal Speaker 5W*2 VGA Audio in*1	PC Audio*1	in*1, out*1
Genera									
Speakers	75mm x 75mm	75mm x 75mm	100mm × 100mm	100mm × 100mm	100mm x 100mm	100mm x 100mm	100mm × 100mm	-	400mm × 200mm



BETTER VISION
FOR BETTER SECURITY
HIKVISION MONITORS

Distributed by



ventas@rosarioseguridad.com.ar



rosarioseguridadok



+54 9 341 6708000



Rosario Seguridad



+54 9 341 6799822



Rosario Seguridad

Grupo Instaladores



<https://www.facebook.com/groups/59185261801274>



+54 9 341 6591429



+54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Germany

T +49-69-401507290
sales.adch@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +6-032-7224000
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-1031-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com

www.hikvision.com

Follow us on social media to get the latest product and solution information:



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



hikvisionhq



Hikvision
Corporate Channel