

PTZ Camera Firmware Version: V5.7.13 SP1

Release Note

Firmware		
Basic Information	Firmware Version:	IPDE_G5H8_EN_5.7.13_221111

1. New Features

- ① Fixed vertical stripes in previews
- ② Support Edge(79.0.309.65 and above) browser for fast automatic calibration
- 3 Added support for SFTP

HIK	VISION®	Live View	Playback	Pictu	re A	oplication	Configuration	VCA		
Ţ	Local	SNMP FTP	Email Pl	Platform Access	HTTPS Qo	S 802.1	x Integration Protocol	Network Service	Alarm Server	TCP A
	System	FTP Protocol	SI	FTP	~					
Ð	Network	Server Addres	s 0.0	.0.0.0						
	Basic Settings	Port	21	1						
	Advanced Settings	User Name								
<u>Q.</u>	Video/Audio	Password								
1	Image	Confirm								
모	PTZ	Directory Struc	ture Si	Save in the root di	irectory 🗸]				
圁	Event	Picture Filing I	nterval O	DFF	~	Day(s)				
	Storage	Picture Name	D	Default	~]				
] Upload Picture						
			Т	Test						
		8	Save							

(4) With ehome 2.0 and 4.0 removed, Hik-Connect is disabled by default

HIK	VISION®	Live View	Playba	ck Pictu	re	Applic	ation	Configuration	VCA
Q	Local	SNMP FTP	Email	Platform Access	HTTPS	QoS	802.1x	Integration Protocol	Network Service
	System	Platform Acces	Platform Access Mode		ISUP				
Ð	Network	Enable Protocol Version		Hik-Connect					
	Basic Settings			ISUP5.0	\sim				
	Advanced Settings	Server Address	Server Address Port						
<u>.</u> 0.	Video/Audio	Port							
1	Image	Device ID		K04062644					
<u> </u>	PTZ	Key	Key Register Status		•••••				
圁	Event	Register Status			Offline				
	Storage								
			Save		Test				


(5) The default value of TLS1.1 is disabled





HIK	VISION®	Live View	Playba	ick Pic	ture	Appli	cation	Configuration	VCA	
Q	Local	SNMP FTP	Email	Platform Access	HTTPS	QoS	802.1x	Integration Protocol	Network Service	Alarm Serve
	System	Enable We	bSocket							
Ð	Network	Enable We	bSockets							
	Basic Settings	Enable SD	K Service							
	Advanced Settings	Enable En	nanced SDk	Service						
<u>Q.</u>	Video/Audio	Server Certific	ate	default		~				
1	Image	Enable TL	51.1	-						
모	PTZ	Enable TL	61.2							
Ë	Event	Enable TL	\$1.3							
	Storage	Enable Bo	njour							
		8	Save							

(6) The name of the panorama tracking page is changed to "Panorama Linkage", and a

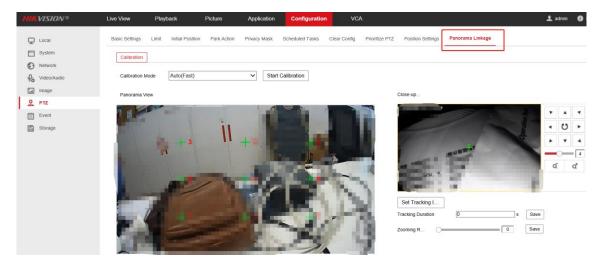

prompt message is added when fast automatic calibration failed

(7) The 4-inch PTZ does not support panoramic linkage, takeover tracking, and circular

tracking

8 Supports AAC

	VISION®	Live View	Playbac		Picture	Applica	ation	Configuration	VCA
Q	Local	Video Audio	ROI	G.722.1 G.711ulaw G.711alaw MP2L2					
	System	Audio Encoding		G.720 AAC					
Ð	Network	Sampling Rate		РСМ Токни		~			
<u>.</u>	Video/Audio	Audio Stream Bit	rate	32kbps		\sim			
1	Image	Audio Input		LineIn		\sim			
모	PTZ	Input Volume			0	75			
圁	Event	Environmental N	oise Filter	OFF		\checkmark			
	Storage								
		🗎 sa	ave						

(9) Support Hik-Connect online upgrade

2. Improved Features





<u>N/A</u>

Customer Impact and Recommended Action

This update refers to function/compatibility improvement and will take effect automatically after the Date of Change. We are very sorry for any inconvenience of use-habit changes caused by this action. For any questions and request for this firmware, please contact our local technical support team.

Remarks:

- Hikvision reserves the right to change, alter or withdraw the above notification without prior notice.
- Product design and specifications are subject to change without prior notice.
- The Hikvision firmware may contain errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.
- Hikvision is not liable for any typing or printing errors.

Hikvision Digital Technology CO., Ltd. No. 555 Qianmo Road, Binjiang District, Hangzhou 310051, China Tel: +86-571-8807-5998

Supported Product List						
Product Category Model Number						
PTZ Camera	DS-2SE4C215MWG-E(12F0)					
	DS-2SE4C225MWG-E(12F0)					
	DS-2SE4C415MWG-E(14F0)					
	DS-2SE4C425MWG-E(14F0)					