

## DS-3E0109P-E/M(B) 100M PoE Switch

DS-3E0109P-E / M (B) es un conmutador PoE de capa 2 100M. Basado en el reenvío de velocidad de cable, el conmutador admite alimentación Ethernet PoE modo de suministro y extensión. La distancia desde la fuente de alimentación alcanza como mínimo hasta 250 m. También admite la transmisión estable de videovigilancia. Importante cuando se conecta a puertos de alta prioridad.



### Características y funciones

- 8 x 100M PoE ports and 1 x 100M Ethernet port.
- Supports IEEE802.3at/af.
- Supports IEEE 802.3, IEEE 802.3u and IEEE 802.3x.
- Supports high priority ports.
- Supports 8-core power supply.
  
- Up to 250 m transmission distance.
- PoE port with 6 KV surge protection.
- Supports PoE output power management.
- 100M network access.
- Wire-speed forwarding and non-blocking design.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Fan-free design with high reliability.




## Especificaciones

Model	DS-3E0109P-E/M(B)
Network parameters	
Port number	8 x 100M PoE ports, 1 x 100M Ethernet port.
Port type	RJ45 port, Full duplex, MDI/MDI-X adaptive
Standard	IEEE802.3, IEEE802.3u, IEEE802.3x
Processing type	Store-and-forward switching
Ports with high priority	1 to 2 ports
Ports for long-distance transmission	1 to 8 ports
MAC address table	2 K
Exchange capacity	1.8 Gbps
Packet forwarding rate	1.339 Mpps
Internal cache	1 Mbits
PoE power supply	
Power supply standard	IEEE 802.3af, IEEE 802.3at
Power supply cable core	Supports 8-core power supply, Ethernet cable 1/2/3/6 and 4/5/7/8 provide simultaneous power supply
PoE port	1 to 8
Max. port power	30 W
Max. machine power	60 W
Mechanical structure	
Shell	Metal material, fan-free design
weight	0.35 kg (0.77 lb)
Dimensions (L x H x D)	170 mm x 27.6 mm x 93.1 mm (6.7" x 1.1" x 3.7")
Environment	
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)
Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Relative humidity	5% to 95% (no condensation)
Power supply	
Power supply specification	48 VDC, 1.35 A

## Interface física

Front panel:

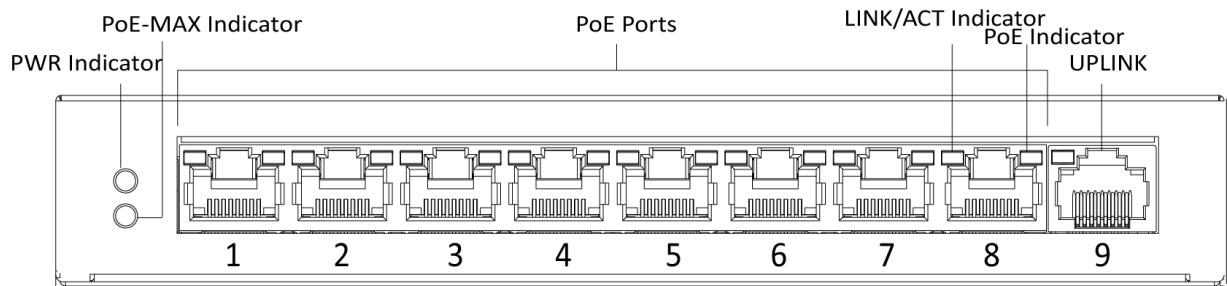


Back panel:




## Modelos disponibles

DS-3E0109P-E/M(B)

## Dimension

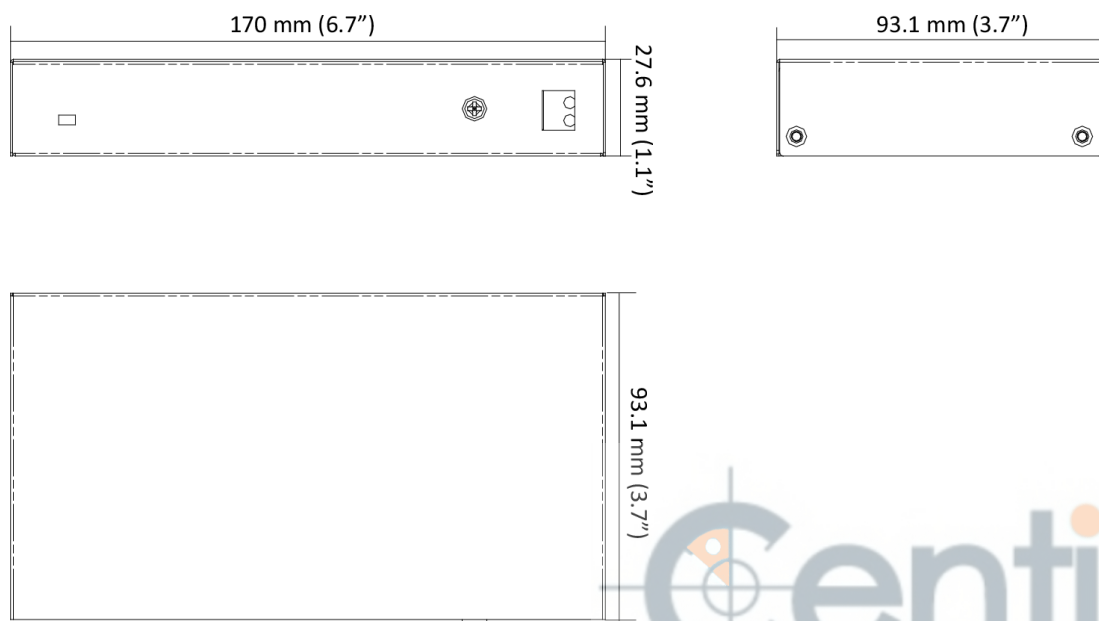

## Typical Application

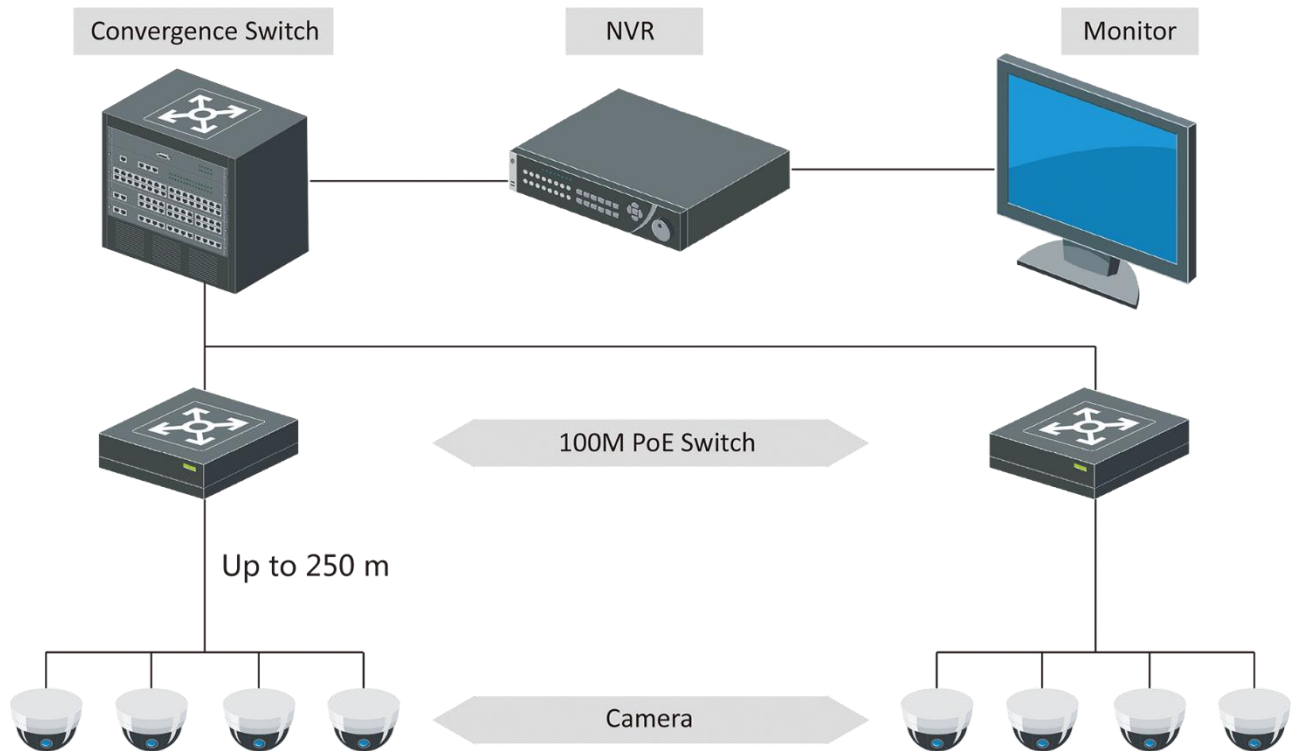

Distributed by

[www.rosarioseguridad.com.ar](http://www.rosarioseguridad.com.ar)

✉ [ventas@rosarioseguridad.com.ar](mailto:ventas@rosarioseguridad.com.ar)

📷 [rosarioseguridadok](https://www.instagram.com/rosarioseguridadok)

📘 **Grupo Instaladores**  
<https://www.facebook.com/groups/591852618012744/>

📞 +54 9 341 6708000

📺 **Rosario Seguridad**

📞 +54 9 341 6591429

📞 +54 9 341 6799822

📘 **Rosario Seguridad**

📞 +54 9 341 4577532

**Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina**

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
[overseasbusiness@hikvision.com](mailto:overseasbusiness@hikvision.com)

**Hikvision USA**  
 T +1-909-895-0400  
[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)

**Hikvision Europe**  
 T +31-23-5542770  
[sales.eu@hikvision.com](mailto:sales.eu@hikvision.com)

**Hikvision UK & Ireland**  
 T +01628-902140  
[sales.uk@hikvision.com](mailto:sales.uk@hikvision.com)

**Hikvision UAE**  
 T +971-4-4432090  
[salesme@hikvision.com](mailto:salesme@hikvision.com)

**Hikvision Russia**  
 T +7-495-669-67-99  
[sateru@hikvision.com](mailto:sateru@hikvision.com)

**Hikvision Australia**  
 T +61-2-8599-4233  
[salesau@hikvision.com](mailto:salesau@hikvision.com)

**Hikvision Italy**  
 T +39-0438-6902  
[info.it@hikvision.com](mailto:info.it@hikvision.com)

**Hikvision South Africa**  
 Tel: +27 (10) 0351172  
[sale.africa@hikvision.com](mailto:sale.africa@hikvision.com)

**Hikvision Singapore**  
 T +65-6684-4718  
[sg@hikvision.com](mailto:sg@hikvision.com)

**Hikvision Korea**  
 T +82-[0]31-731-8817  
[sales.korea@hikvision.com](mailto:sales.korea@hikvision.com)

**Hikvision India**  
 T +91-22-28469900  
[sales@pramahikvision.com](mailto:sales@pramahikvision.com)

**Hikvision Brazil**  
 T +55 11 3318-0050  
[Latam.support@hikvision.com](mailto:Latam.support@hikvision.com)

**Hikvision France**  
 T +33(0)1-85-330-450  
[info.fr@hikvision.com](mailto:info.fr@hikvision.com)

**Hikvision Spain**  
 T +34-91-737-16-55  
[info.es@hikvision.com](mailto:info.es@hikvision.com)

**Hikvision Poland**  
 T +48-22-460-01-50  
[info.pl@hikvision.com](mailto:info.pl@hikvision.com)

**Hikvision Canada**  
 T +1-866-200-6690  
[sales.canada@hikvision.com](mailto:sales.canada@hikvision.com)

**Hikvision Turkey**  
 T +90 (216)521 7070- 7074  
[sales.tr@hikvision.com](mailto:sales.tr@hikvision.com)

**Hikvision Kazakhstan**  
 T +7-727-9730667  
[nikia.panfilov@hikvision.ru](mailto:nikia.panfilov@hikvision.ru)

**Hikvision Tashkent**  
 T +99-87-1238-9438  
[lzb@hikvision.ru](mailto:lzb@hikvision.ru)

**Hikvision Indonesia**  
 T +62-21-2933759  
[Sales.Indonesia@hikvision.com](mailto:Sales.Indonesia@hikvision.com)

**Hikvision Thailand**  
 T +662-275-9949  
[sales.thailand@hikvision.com](mailto:sales.thailand@hikvision.com)

**Hikvision Malaysia**  
 T +601-7652-2413  
[sales.my@hikvision.com](mailto:sales.my@hikvision.com)

**Hikvision Vietnam**  
 T +84-974270888  
[sales.vt@hikvision.com](mailto:sales.vt@hikvision.com)

**Hikvision Hong Kong**  
 T +852-2151-1761  
[info.hk@hikvision.com](mailto:info.hk@hikvision.com)

**Hikvision Colombia**  
[sales.colombia@hikvision.com](mailto:sales.colombia@hikvision.com)