

DS-9600NI-I8 Series NVR

Funciones clave

- Formatos de video H.265 + / H.265 / H.264 + / H.264
- Entradas de cámara IP de hasta 16/32/64 canales
- Descodificación de hasta 1 canal a 32 MP / 2 canales a 12 MP / 16 canales a 1080p
- capacidad
- 8 interfaces SATA para conexión HDD
- Intercambio en caliente de HDD con RAID 0/1/5/6/10



Profesionalidad y confiabilidad

- La compresión H.265 + reduce eficazmente el espacio de almacenamiento hasta en un 75%
- La grabación de doble flujo ahorra ancho de banda
- Adopta la tecnología Stream over TLS encryption que proporciona un servicio de transmisión de flujo más seguro
- Admite doble verificación para reproducción y descarga

Salida de video HD

- Proporciona salidas HDMI y VGA independientes
- Salida de video HDMI con una resolución de hasta 4K

Almacenamiento y reproducción

- HDD intercambiable en caliente con esquema de almacenamiento configurable RAID 0, RAID 1, RAID 5, RAID 6 y RAID 10
- 1 interfaz eSATA para conexión HDD
- Reproducción sincrónica de 16 canales

Función inteligente y POS

- Admite varios eventos de VCA (análisis de contenido de vídeo)
- Funciones inteligentes configurables de la cámara especial, como detección de VCA (movimiento, cruce de línea, intrusión, etc.), mapa de calor, ANPR y contador de personas
- Superposición de información de POS en visualización en vivo y reproducción, y grabación y alarma activadas por POS

Network & Ethernet Access

- 2 interfaces Ethernet autoadaptables de 10/100/1000 Mbps
- Hik-Connect y DDNS (Dynamic Domain Name System) para una fácil gestión de la red
- Tecnología de transmisión fluida
- Support web access without plug-in




Specification

Model	DS-9616NI-I8	DS-9632NI-I8	DS-9664NI-I8
Video and Audio			
	16-ch	32-ch	64-ch
IP video input	Up to 12 MP resolution *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled. For DS-9632NI-I8, when ultra HD resolution mode is enabled, it will reduce the IP video input to 24-ch.		
Incoming bandwidth	256 Mbps	320 Mbps	320 Mbps
Outgoing bandwidth	256 Mbps		
Incoming bandwidth (RAID mode)	200 Mbps		
Outgoing bandwidth (RAID mode)	200 Mbps		
HDMI 1 output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
HDMI 2 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
VGA 1 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
VGA 2 output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
Video output mode	HDMI 1 and VGA 1 provide simultaneous video output, and work as the main output; HDMI 2 and VGA 2 provide simultaneous video output, and work as the auxiliary output		
CVBS output (optional)	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
Audio output	2-ch, RCA (Linear, 1 KΩ)		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)		
Decoding			
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4		
Recording resolution	32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF *: 32 MP and 24 MP is only available for channel 1 when ultra HD resolution mode is enabled. For DS-9632NI-I8, when ultra HD resolution mode is enabled, it will reduce the IP video input to 24-ch.		
Synchronous playback	16-ch		
Capability	1-ch@32 MP (30 fps)/2-ch@12 MP (20fps)/4-ch@8 MP (25fps)/8-ch@4 MP (30fps)/16-ch@1080p (30fps)		
Dual stream recording	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2/PCM		
Network			
Remote connection	128		
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS		
Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		


Network mode	Net Fault-Tolerance, Multi-address
RAID	
RAID Type	RAID0, RAID1, RAID5, RAID6, and RAID10 (at least 4 TB for each HDD)
Auxiliary interface	
Serial port	1 RS-485 (full-duplex), 1 RS-232, 1 keyboard
SATA	8 SATA interfaces supporting hot-plug
eSATA	1 eSATA interface
Capacity	Up to 10 TB capacity for each disk
Alarm in/out	16/4
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC, 50 to 60 Hz
Consumption (without HDD)	≤ 30 W
Fan	Speed self-adjustable
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Chassis	3U chassis
Dimension (W × D × H)	445 × 465 × 92 mm (17.5"× 18.3" × 3.6")
Weight (without HDD)	≤ 10 kg (22 lb)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

Dimension

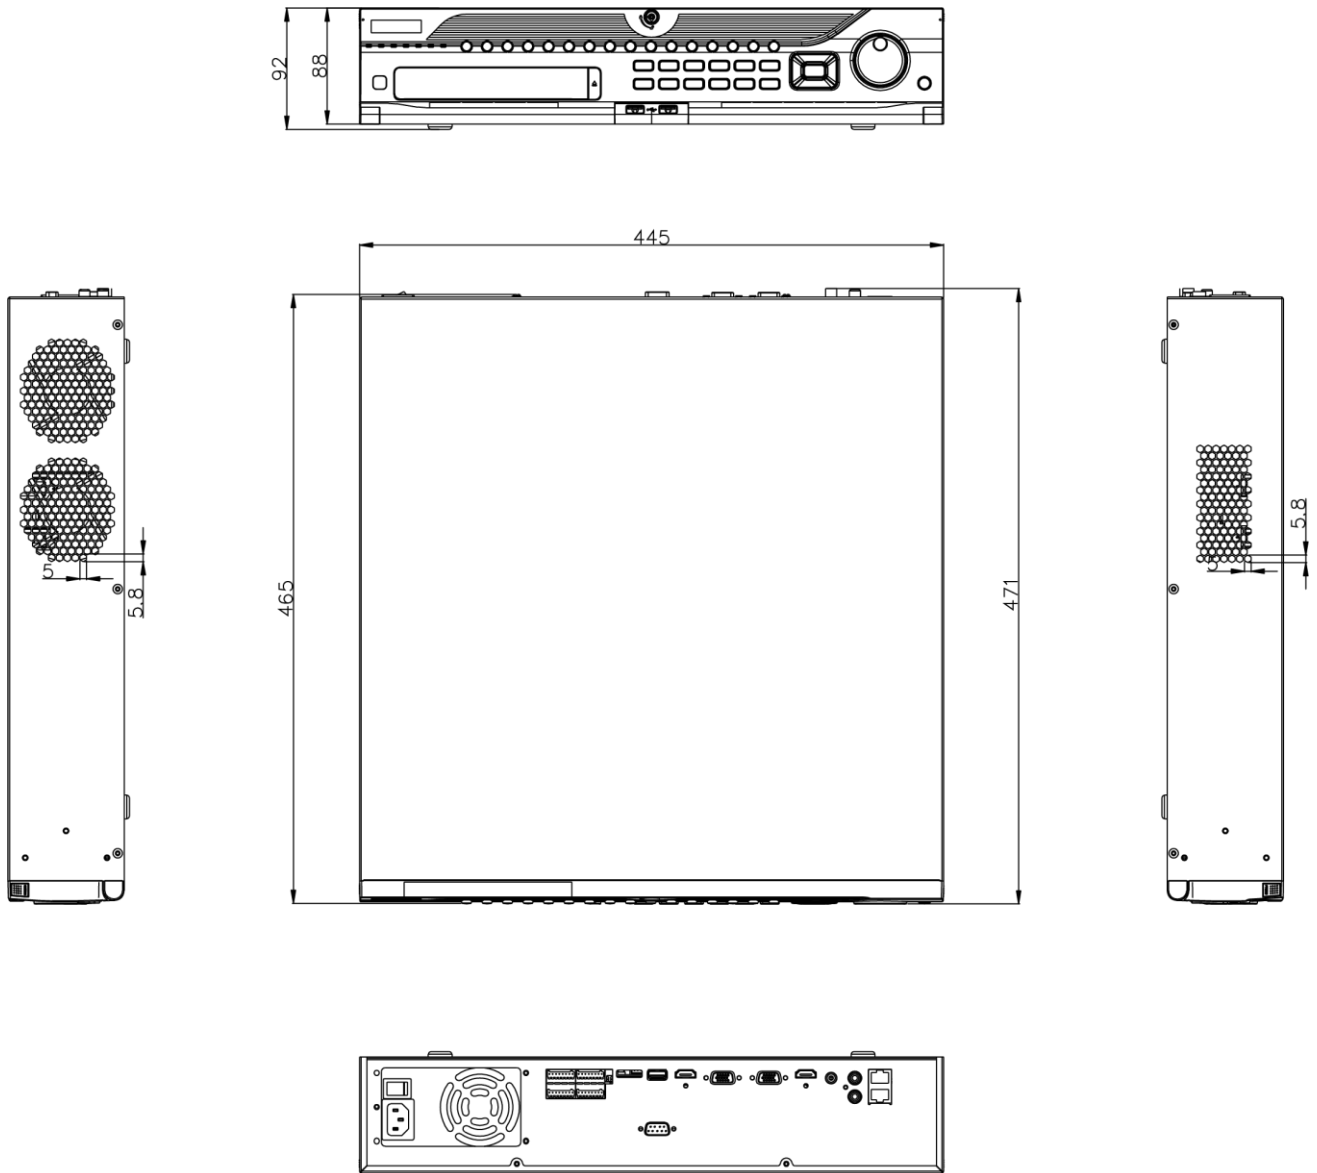

scale/1:1;Unit/mm

Physical Interface

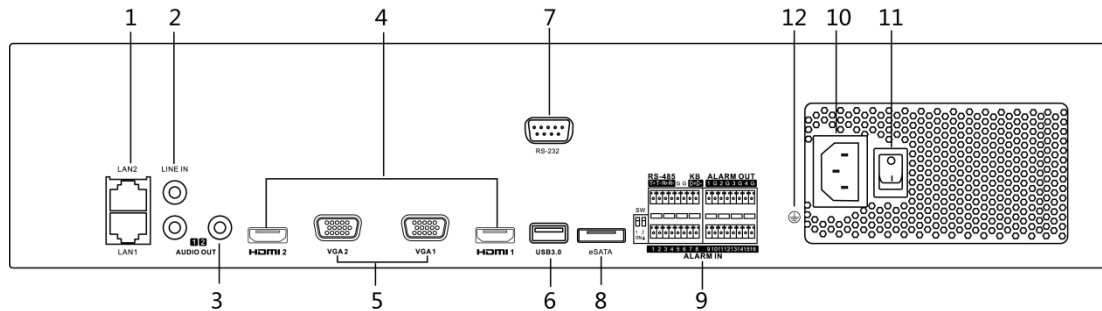

No.	Description	No.	Description
1	LAN Interfaces	7	RS-232 Serial Interface
2	LINE IN, RCA Connector	8	eSATA Interface
3	AUDIO OUT, RCA Connector	9	SW Dial Switch, RS-485 Serial Interface, Controller Port, ALARM IN, ALARM OUT
4	HDMI 1 and HDMI 2 Interfaces	10	100 to 240 VAC Power Supply
5	VGA 1 and VGA 2 Interfaces	11	Power Switch
6	USB 3.0 Interface	12	GND

Available Model

DS-9616NI-I8, DS-9632NI-I8, DS-9664NI-I8

Distributed by

ventas@rosarioseguridad.com.ar
 rosarioseguridadok
 <https://www.facebook.com/groups/591852618012744/>
 +54 9 341 6708000
 Rosario Seguridad
 +54 9 341 6591429
 +54 9 341 6799822
 Rosario Seguridad
 +54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
sales.au@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

04400102001118