

DS-KIS203 Videoportero análogo

Key Features

Door Station


- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling

Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Remote unlocking
- Convenient installation and easy operation



Typical Application

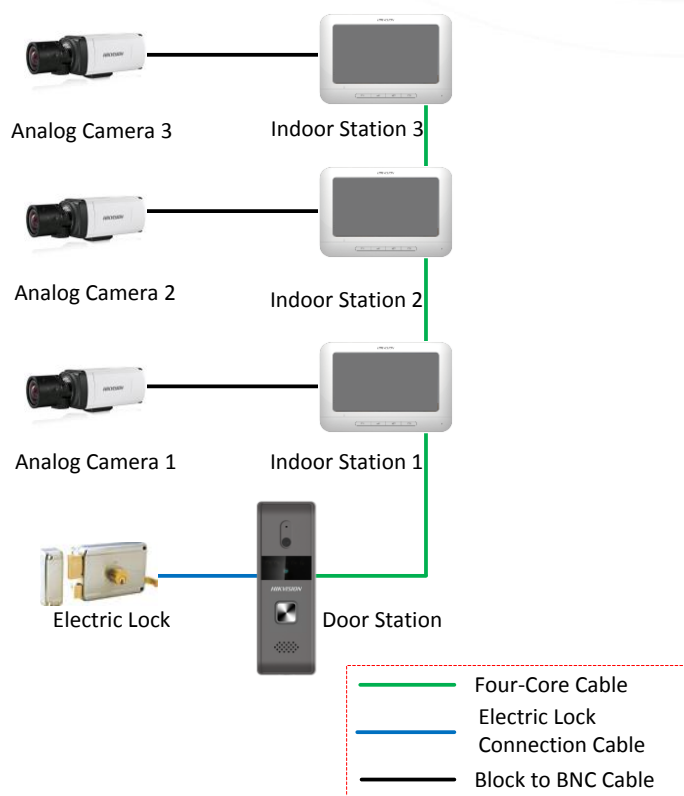


Specifications

Video Door Phone Model	DS-KIS203
Door Station (DS-KB2421-IM)	
Video Parameters	
Camera	1/4" CMOS
Resolution	720 × 576
Video frame rate	PAL: 25 fps
Audio parameters	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression
Light Supplement	
Light supplement mode	Photosensitive IR Supplement, IR Range: 2 Meters
Device interfaces	
Four-wire interface	1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding)
I/O output	1 Relay Output
General	
Material	Zinc Alloy
Power consumption	Max. 5W
Working temperature	-30° C to +70° C (-22° F to 158° F)
Working humidity	10% to 90%
Dimension (L x W x H)	145mm × 49.2 mm × 26.45 mm (5.7" × 1.9" × 1.0")
Indoor Station (DS-KH2220)	
Display parameters	
Display screen	7-Inch Colorful TFT LCD
Display resolution	800 × 480
Operation method	Physical Button
Audio parameters	
Audio input	Built-in Omnidirectional Microphone
Audio output	Built-in Loudspeaker
Audio quality	Noise Suppression and Echo Cancellation
Device interfaces	
Four-wire interface	4 Four-Wire Interfaces
	1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding
General	
Power supply	12 VDC
Power consumption	≤ 5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimension (L x W x H)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")


Appearance and Interfaces

Door Station

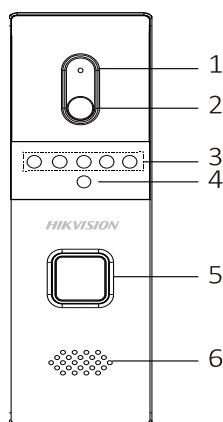

Index	Description
1	Microphone
2	Built-in Camera
3	Supplement Light
4	Photoresistor
5	Call Button
6	Loudspeaker

Indoor Station

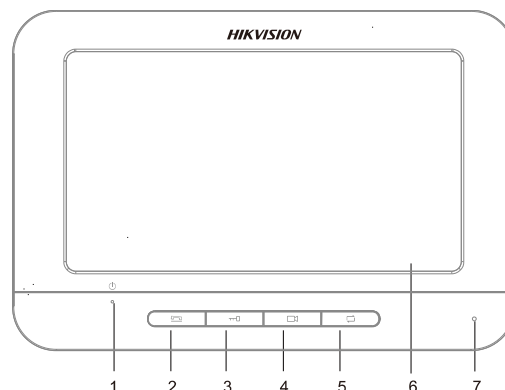

Index	Description
1	Power Supply Indicator
2	Call Accept/Decline Key
3	Unlock Key
4	Live View Key
5	Switch Key
6	LCD Screen
7	Microphone

Distributed by

ventas@rosarioseguridad.com.ar
 +54 9 341 6708000
 +54 9 341 6799822
 rosarioseguridadok
 Rosario Seguridad
 Rosario Seguridad

Grupo Instaladores

<https://www.facebook.com/groups/591852618012744/>
 +54 9 341 6591429
 +54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahirvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com