

**DS-2CD1143G0-I**

**Cámara de red domo fija 4 Mp**



- Imágenes de alta calidad con resolución de 4 MP
- Tecnología de compresión eficiente H.265 +
- Imágenes nítidas incluso con una fuerte iluminación de fondo gracias a WDR de 120 dB
- Resistente al agua y al polvo (IP67) y resistente al vandalismo (IK10)
- EXIR 2.0: tecnología infrarroja avanzada con largo alcance IR



## ▪ Especificaciones



<b>Camara</b>	
Sensor de Imagen	1/3" progressive scan CMOS
Min. Iluminacion	Color: 0.01 Lux @(F1.2, AGC ON), 0.028 Lux @ (F2.0, AGC ON)
Velocidad obturador	1/3 s to 1/100, 000 s
Obturador Lento	Yes
Dia & Noche	IR cut filter
Wide Dynamic Range	120 dB
Angulo de ajuste	Pan: 0° to 355°, tilt: 0° to 75°
DNR	3D DNR
<b>Lente</b>	
Lente	2.8 mm,
Apertura	F2.0
Foco	Fixed
FOV	2.8 mm, horizontal FOV 98°, vertical FOV 53°, diagonal FOV 115° 4 mm, horizontal FOV 77°, vertical FOV 42°, diagonal FOV 91°
Montura de Lente	M12
<b>Iluminador</b>	
Rango InfraRojos	Hasta 30 m
Longitud de onda	850 nm
<b>Video</b>	
Max. Resolucion	2560 × 1440
Compresion video	Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
Video Bit Rate	32 Kbps to 8 Mbps
<b>Smart Feature-Set</b>	
Region of Interest	1 fixed region for main stream
<b>Imagen</b>	
Image Enhancement	HLC, BLC, 3D DNR
Image Setting	Saturation, brightness, contrast, sharpness, AGC, white balance adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Day/Night
Main Stream Max. Frame Rate	50Hz: 20 fps (2560 × 1440) 25 fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 20 fps (2560 × 1440) 30 fps (2304 × 1296, 1920 × 1080, 1280 × 720)
Sub-stream Max. Frame Rate	50Hz: 25 fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30 fps (640 × 480, 640 × 360, 320 × 240)
<b>Red</b>	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, QoS, IPv6, UDP, Bonjour
API	Open Network Video Interface (Profile S), ISAPI, SDK

Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users, 3 levels: Administrator, Operator and User
Client	iVMS-4200, Hik-Connect, iVMS-5200
Web Browser	Plug-in required live view: IE 10, IE 11 Local service: Chrome 57.0+, Firefox 52.0+
Alarm Trigger	Motion detection, video tampering, exception (network disconnected, IP address conflict, illegal login, HDD error)
<b>Interface</b>	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
<b>Approval</b>	
Impact Protection	IK10TVS 2000V lightning protection, surge protection and voltage transient protection
<b>Compression Standard</b>	
H.264+	Main stream supports
H.265+	Main stream supports
<b>General</b>	
Firmware Version	V5.5.111
Web Client Language	English, Ukrainian
General Function	Anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F), humidity: 95% or less (non-condensing)
Power Supply	12 VDC ± 25% PoE: 802.3af, Class 3
Material	Aluminum alloy body
Dimensions	Camera: Ø111 mm × 82.4 mm (Ø4.4" × 3.2") With package: 134 mm × 134 mm × 108 mm (5.3" × 5.3" × 4.3")
Weight	Camera: approx. 360 g (0.8 lb.) With package: approx. 560 g (1.2 lb.)
Power Consumption and Current	12 VDC, 0.4 A, max. 5 W PoE (802.3af, 36 V to 57 V), 0.20 A to 0.15 A, max. 6.5 W
Interface Protection	IP67 (IEC 60529-2013), IK10 (IEC 62262:2002)

#### ▪ Available Model

DS-2CD1143G0-I (2.8/4mm)

▪ **Dimension**

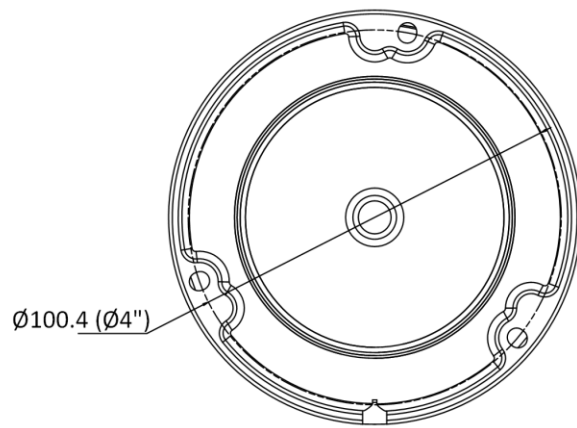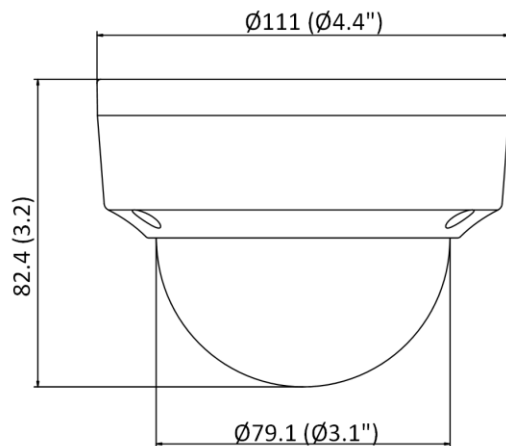

Unit: mm (inch)

▪ **Accessory**

▪ **Optional**

<b>DS-1280ZJ-DM18</b> Junction Box	<b>DS-1276ZJ-SUS</b> Corner Mount	<b>DS-1258ZJ</b> Wall Mount	<b>DS-1272ZJ-110</b> Wall Mount	<b>DS-1250ZJ</b> Rain Shade
				
<b>DS-1275ZJ-SUS</b> Vertical Pole Mount	<b>DS-1272ZJ-110B</b> Wall Mount	<b>DS-1271ZJ-110</b> Pendant Mount	<b>DS-1259ZJ</b> Inclined Ceiling Mount	
				

Distributed by

✉ [ventas@rosarioseguridad.com.ar](mailto:ventas@rosarioseguridad.com.ar)

☎ +54 9 341 6708000

☎ +54 9 341 6799822

📷 [rosarioseguridadok](https://www.instagram.com/rosarioseguridadok)

📺 Rosario Seguridad

📘 Rosario Seguridad

Grupo Instaladores

📘 <https://www.facebook.com/groups/591852618012744/>

☎ +54 9 341 6591429

☎ +54 9 341 4577532

**Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina****HIKVISION®****Headquarters**No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[overseasbusiness@hikvision.com](mailto:overseasbusiness@hikvision.com)**Hikvision USA**  
T +1-909-895-0400  
[sales.usa@hikvision.com](mailto:sales.usa@hikvision.com)**Hikvision Australia**  
T +61-2-8599-4233  
[salesau@hikvision.com](mailto:salesau@hikvision.com)**Hikvision India**  
T +91-22-28469900  
[sales@pramahikvision.com](mailto:sales@pramahikvision.com)**Hikvision Canada**  
T +1-866-200-6690  
[sales.canada@hikvision.com](mailto:sales.canada@hikvision.com)**Hikvision Thailand**  
T +662-275-9949  
[sales.thailand@hikvision.com](mailto:sales.thailand@hikvision.com)**Hikvision Europe**  
T +31-23-5542770  
[sales.eu@hikvision.com](mailto:sales.eu@hikvision.com)**Hikvision Italy**  
T +39-0438-6902  
[info.it@hikvision.com](mailto:info.it@hikvision.com)**Hikvision Brazil**  
T +55 11 3318-0050  
[Latam.support@hikvision.com](mailto:Latam.support@hikvision.com)**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
[sales.tr@hikvision.com](mailto:sales.tr@hikvision.com)**Hikvision Malaysia**  
T +601-7652-2413  
[sales.my@hikvision.com](mailto:sales.my@hikvision.com)**Hikvision UK & Ireland**  
T +01628-902140  
[sales.uk@hikvision.com](mailto:sales.uk@hikvision.com)**Hikvision South Africa**  
Tel: +27 (10) 0351172  
[sale.africa@hikvision.com](mailto:sale.africa@hikvision.com)**Hikvision France**  
T +33(0)1-85-330-450  
[info.fr@hikvision.com](mailto:info.fr@hikvision.com)**Hikvision Kazakhstan**  
T +7-727-9730667  
[nikia.panfilov@hikvision.ru](mailto:nikia.panfilov@hikvision.ru)**Hikvision Vietnam**  
T +84-974270888  
[sales.vt@hikvision.com](mailto:sales.vt@hikvision.com)**Hikvision UAE**  
T +971-4-4432090  
[salesme@hikvision.com](mailto:salesme@hikvision.com)**Hikvision Singapore**  
T +65-6684-4718  
[sg@hikvision.com](mailto:sg@hikvision.com)**Hikvision Spain**  
T +34-91-737-16-55  
[info.es@hikvision.com](mailto:info.es@hikvision.com)**Hikvision Tashkent**  
T +99-87-1238-9438  
[uzb@hikvision.ru](mailto:uzb@hikvision.ru)**Hikvision Hong Kong**  
T +852-2151-1761  
[info.hk@hikvision.com](mailto:info.hk@hikvision.com)**Hikvision Russia**  
T +7-495-669-67-99  
[sateru@hikvision.com](mailto:sateru@hikvision.com)**Hikvision Korea**  
T +82-(0)31-731-8817  
[sales.korea@hikvision.com](mailto:sales.korea@hikvision.com)**Hikvision Poland**  
T +48-22-460-01-50  
[info.pl@hikvision.com](mailto:info.pl@hikvision.com)**Hikvision Indonesia**  
T +62-21-2933759  
[Sales.Indonesia@hikvision.com](mailto:Sales.Indonesia@hikvision.com)**Hikvision Colombia**  
[sales.colombia@hikvision.com](mailto:sales.colombia@hikvision.com)