

DS-2CD3751G0-I(Z)

Cámara de Red Domo varifocal PIR de 5 megapíxeles



Características

- CMOS de exploración progresiva de 1/2,7"
- 2560 × 1920 a 15 fps
- Color: 0,01 lux @ (F1.2; AGC ENCENDIDO), 0,02 lux @ (F1.6; AGC ENCENDIDO)
- Lentes varifocales de 2,7 a 13,5 mm
- H.265+, H.265, H.264+, H.264
- BLC/3D DNR/ROI/HLC
- IP67, IK10
- 2 Análisis de comportamiento

Especificaciones


Camara	
Sensor de Imagen	1/2.7" Progressive Scan CMOS
Min. Iluminacion	Color: 0.01 Lux @(F1.2; AGC ON), 0.02 Lux @ (F1.6, AGC ON)
Velocidad de obturacion	1/3 s to 1/100,000 s
Obturador lento	Si
Auto-Iris	No
Dia & Noche	IR Cut Filter
Digital Noise Reduction	3D DNR
Wide Dynamic Range	120 dB
3-Axis Adjustment	Pan: 0° to 355°, tilt: 0° to 70°, rotate: 0° to 355°
Lentes	
Focal Length	2.7 to 13.5 mm
Apertura	F1.6
Focus	With -Z model: Auto Without -Z model: Manual
FOV	Horizontal FOV: 98° to 28°, vertical FOV: 71° to 21°, diagonal FOV: 130° to 35°
Lens Mount	Ø14
IR	
IR Range	Up to 40 m
Wavelength	850nm
Compression Standard	
Video Compression	Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264
H.264 Type	Baseline Profile/Main Profile/High Profile
H.264+	Main stream supports
H.265 Type	Main Profile
H.265+	Main stream supports
Video Bit Rate	32 Kbps to 8Mbps
Conjunto de funciones inteligentes	
Análisis de comportamiento	Detección de cruce de línea, detección de intrusión
Region of Interest	Support 1 fixed region for main stream and sub-stream
Imagen	
Max. Resolution	2560 × 1920
Main Stream	50Hz: 12.5fps (2560 × 1920), 20fps (2560 × 1440), 25fps (2304 × 1296, 1920 × 1080, 1280 × 720) 60Hz: 15fps (2560 × 1920), 20fps (2560 × 1440), 30fps (2304 × 1296, 1920 × 1080, 1280 × 720)
Sub Stream	50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)
Third Stream Max. Frame Rate	50Hz: 1fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240, 320 × 240) 60Hz: 1fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240, 320 × 240)
Image Enhancement	BLC/3D DNR/HLC
Image Settings	Saturation, brightness, contrast and sharpness are adjustable via client software and web browser
Day/Night Switch	Auto/Scheduled/Day/Night
Red	

Network Storage	Support MicroSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD error, HDD full
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, QoS, IPv6, UDP, Bonjour, 802.1x
General Function	One-key reset, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Firmware Version	V5.5.52
API	ONVIF(PROFILE S,PROFILE G), ISAPI
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator and User
Client	iVMS-4200, Hik-Connect, iVMS-5200, iVMS-4500
Web Browser	IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+
Interface	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128G
Video Out (Without -Z Model)	1 Vp-p Composite Output(75Ω/BNC)
Reset Button	Yes
General	
Operating Conditions	-30 °C to +60 °C (-22 °F to +140 °F), Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 25% PoE: 802.3af, class 3
Power Consumption and Current	With -Z model: 12 VDC, 0.8 A, max. 10 W PoE (802.3af, 36 to 57 V), 0.4 A to 0.2 A, max. 12 W Without -Z model: 12 VDC, 0.5 A, max. 6 W PoE (802.3af, 36 to 57 V), 0.3 A to 0.1 A, max. 8 W
Protection Level	IP67, IK10
Material	Bubble: plastic, front cover & bottom base: metal
Dimensions	Camera: Φ141 mm × 99 mm (5.6" × 3.9") With package: 140 mm × 140 mm × 154 mm (5.5" × 5.5" × 6.1")
Weight	Camera: approx. 800 g (1.8 lb.) With package: approx. 1050 g (2.3 lb.)

Modelos disponibles:

DS-2CD3751G0-I (2.7 to 13.5 mm), DS-2CD3751G0-IZ (2.7 to 13.5 mm)

Dimensions

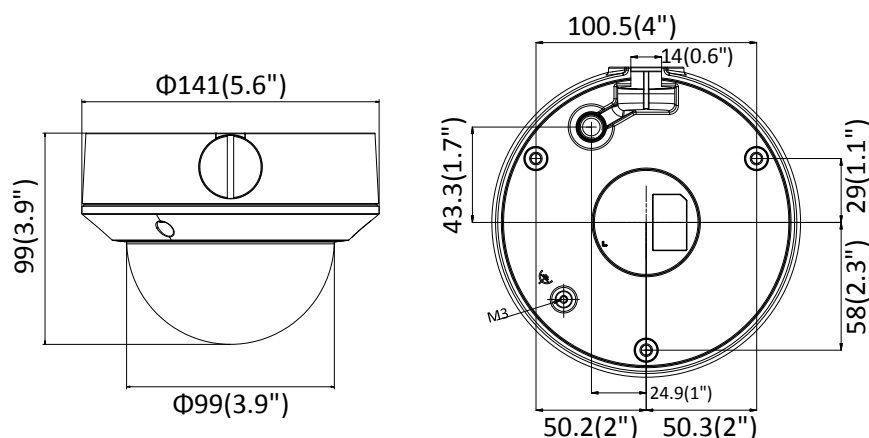

Unit: mm(inch)

Accessorios



DS-1271ZJ-135
Pendant Mount



DS-1273ZJ-135
Wall Mount



DS-1273ZJ-135B
Wall mount
with junction box



DS-1275ZJ-SUS
Vertical Pole Mount



DS-1276ZJ-
SUS
Corner Mount



DS-1227ZJ
In-ceiling mount



DS-1280ZJ-DM21
Junction Box



DS-1281ZJ-DM23
Inclined ceiling mount



DS-1253ZJ-L
Rain Shade



DS-1250ZJ
Rain Shade



DS-1258ZJ-L
Wall Mount



ventas@rosarioseguridad.com.ar



+54 9 341 6708000



+54 9 341 6799822



rosarioseguridadok



Rosario Seguridad



Rosario Seguridad

Grupo Instaladores



<https://www.facebook.com/groups/591852618012744/>



+54 9 341 6591429



+54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina