

DS-2CE56D0T-VFIR3FHD
Camara Turret Varifocal 2 MP IR 40 mts



Características clave

- CMOS de alto rendimiento de 2 megapíxeles
- Salida HD analógica, resolución de hasta 1920x1080
- Interruptor día / noche
- Smart IR
- Hasta 40 m distanciaq IR
- Switchable TVI/AHD/CVI/CVBS
- IP66



Especificaciones

Camera	
Image Sensor	2MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920 (H) × 1080 (V)
Min. illumination	0.01 Lux@(F1.2,AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	2.8 - 12 mm @ F1.4
	Angle of view: 102.25° - 32°
Lens Mount	Φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62 dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensation)
Power Supply	12 VDC ± 15%
Power Consumption	Max. 4 W
Protection Level	IP66
IR Range	Up to 40 m
Dimensions	Φ130.54 × 102.4mm (Φ5.1" × 4")
Weight	Approx. 710g

Order Model

DS-2CE56D0T-VFIR3F

Cámara
Sensor De Imagen
2MP CMOS image sensor
Max. Resolución
1920 (H) x 1080 (V)
Iluminación Mínima
0.01 Lux@(F1.2,AGC ON), 0 Lux with IR
Tiempo De Obturación
1/25 (1/30) s to 1/50,000 s
Día Y Noche
ICR
Ajuste De Ángulo
Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Señal Del Sistema
PAL/NTSC

Lente
2.8 - 12 mm @ F1.4
Focal Length & FOV
102.25° - 32 °
Montura Del Lente
Φ14

Imagen
Frame Rate
1080p@25fps/1080p@30fps
Wide Dynamic Range (WDR)
>62 dB
Interfaz
Salida De Vídeo
1 HD analog output

General


Dimensión
Φ130.54 × 102.4mm (Φ5.1" × 4")
Approx. 710g
Operating Condition
-40° C to 60° C (-40° F to 140° F), Humidity 90%
or less (no condensation)

Fuente De Alimentación
12 VDC±15%
Consumo
Max. 4 W

Rango IR
Up to 40 m
Certificaciones
Protección
IP66



Dimensions

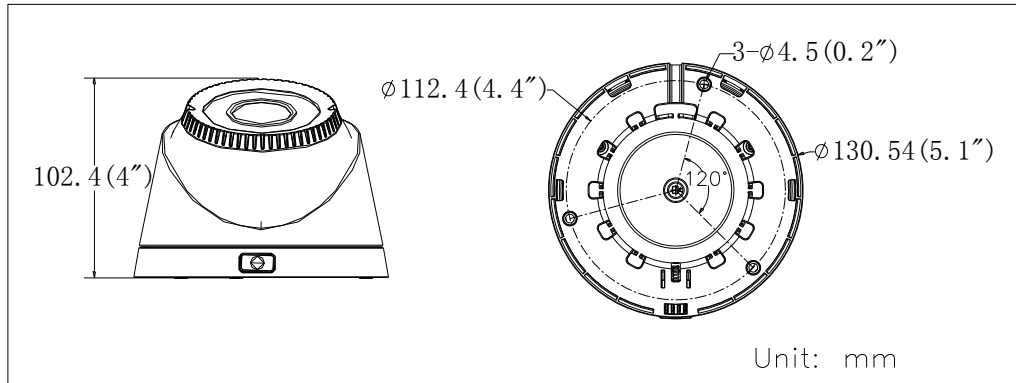

Accessories



DS-1273ZJ-130-TRL
Wall Mounting



DS-1275ZJ
Vertical Pole Mounting



DS-1276ZJ
Corner Mounting



DS-1280ZJ-M
Junction Box



DS-1281ZJ-S
Inclined Ceiling Mounting



DS-1H18
Video Balun



X41T
Camera Tester

Distributed by

✉ ventas@rosarioseguridad.com.ar

☎ +54 9 341 6708000

☎ +54 9 341 6799822

📷 [rosarioseguridadok](https://www.instagram.com/rosarioseguridadok)

📺 Rosario Seguridad

📘 Rosario Seguridad

Grupo Instaladores

📘 <https://www.facebook.com/groups/591852618012744/>

☎ +54 9 341 6591429

☎ +54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland

T +48-22-460-01-50
poland@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision UK

T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe

T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Singap

T +65-6684-4718
sg@hikvision.com

Hikvision Middle East

T +971-4-8816086
salesme@hikvision.com

Hikvision France

T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania

T +61-2-8589-4233
salesau@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong

T +852-2151-1761

0100001061107