

DS-7616NI-Q2/16P NVR

Funciones clave

- Entradas de cámara IP de hasta 16 canales
- Formatos de video H.265 + / H.265 / H.264 + / H.264.265+ /
- Capacidad de codificación de hasta 1 canal a 8 MP / 5 canales a 1080p
- Ancho de banda entrante de hasta 160 Mbps



Profesionalidad y confiabilidad

- La compresión H.265 + reduce eficazmente el espacio de almacenamiento hasta en un 75%

Salida de video HD

- Proporciona salidas HDMI y VGA simultáneas
- Salida de video HDMI con una resolución de hasta 4K

Almacenamiento y reproducción

- 2 interfaces SATA para conexión HDD (hasta 8 TB de capacidad por HDD)
- Búsqueda inteligente / reproducción inteligente para mejorar la eficiencia de reproducción

Función inteligente

- Admite múltiples eventos de VCA (análisis de contenido de video)
- Funciones inteligentes de cámara especiales configurables, como detección de VCA (movimiento, cruce de línea, intrusión, etc.), mapa de calor, ANPR y conteo personas

Acceso a red y Ethernet


- 16 interfaces de red PoE independientes
- 1 interfaz Ethernet autoadaptable de 10/100/1000 Mbps
- HHik-Connect y DDNS (Dynamic Domain Name System) para una fácil gestión de la red



Specification


| | |
|--|---|
| Model | DS-7616NI-Q2/16P |
| Video and Audio | |
| IP video input | 16-ch Up to 8 MP resolution |
| Incoming bandwidth | 160 Mbps |
| Outgoing bandwidth | 80 Mbps |
| HDMI output | 1-ch, 4K (4096 x 2160)/30 Hz, 4K (3840 x 2160)/30 Hz, 2K (2560 x 1440)/60 Hz, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz |
| VGA output | 1-ch, 1920 x 1080/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz |
| Video output mode | HDMI/VGA simultaneous output |
| CVBS output | N/A |
| Audio output | 1-ch, RCA (Linear, 1 KΩ) |
| Two-way audio input | 1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input) |
| Decoding | |
| Decoding format | H.265+/H.265/H.264+/H.264 |
| Recording resolution | 8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF |
| Synchronous playback | 16-ch |
| Capability | 1-ch@8 MP (30 fps)/5-ch@1080p (30 fps) |
| Stream type | Video, Video & Audio |
| Audio compression | G.711ulaw/G.711alaw/G.722/G.726 |
| Network | |
| Remote connection | 64 |
| Network protocol | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS |
| Network interface | 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface |
| PoE | |
| Interface | 16, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤ 150 W |
| Supported standard | IEEE 802.3 af/at |
| Auxiliary Interface | |
| SATA | 2 SATA interfaces |
| Capacity | Up to 8 TB capacity for each disk |
| USB interface | Front panel: 1 x USB 2.0; Rear panel: 1 x USB 2.0 |
| General | |
| Power supply | 100 to 240 VAC, 50 to 60 Hz |
| Consumption (without HDD and PoE off) | ≤ 15 W |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F) |
| Working humidity | 10% to 90% |
| Dimension (W x D x H) | 385 x 315 x 52 mm (15.2" x 12.4" x 2.0") |
| Weight (without HDD) | ≤ 2.6 kg (5.7 lb) |
| Certification | |
| FCC | Part 15 Subpart B, ANSI C63.4-2014 |

Dimension

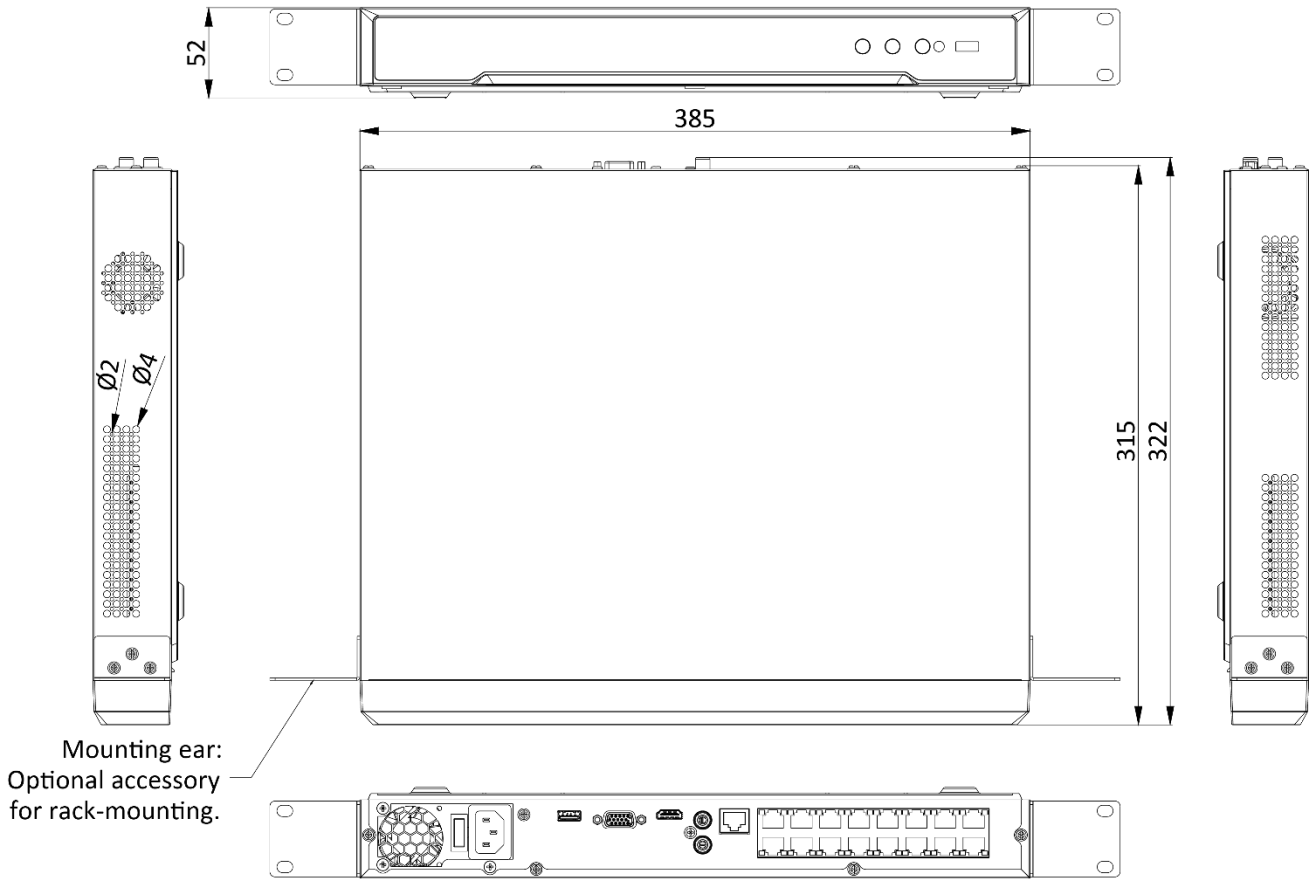

scale/1:1;Unit/mm

Physical Interface

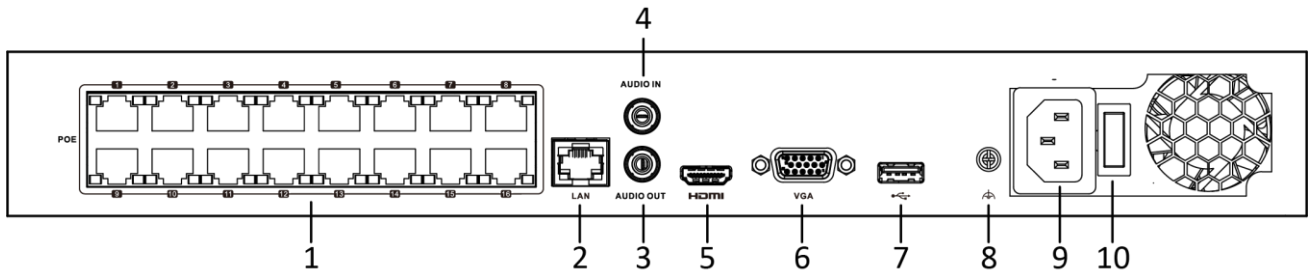

| No. | Description | No. | Description |
|-----|----------------|-----|----------------------------|
| 1 | PoE Interfaces | 6 | VGA Output (DB9 Connector) |
| 2 | LAN Interface | 7 | USB Interface |
| 3 | AUDIO OUT | 8 | GND |
| 4 | AUDIO IN | 9 | Power Supply |
| 5 | HDMI Interface | 10 | Power Switch |

Available Model

DS-7616NI-Q2/16P

Distributed by

ventas@rosarioseguridad.com.ar
 rosarioseguridadok
 +54 9 341 6708000
 Rosario Seguridad
 +54 9 341 6799822
 Rosario Seguridad

Grupo Instaladores

<https://www.facebook.com/groups/591852618012744/>
 +54 9 341 6591429
 +54 9 341 4577532

Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 [10] 0351172
sale.africa@hikvision.com

Hikvision France
T +33[0]1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

04302102001219