

DS-3E0526P-E/M
Conmutador Switch POE Fast Ethernet de 24 Port Gigabit



- 24 × puerto Gigabit PoE, 2 × puerto de fibra óptica Gigabit SFP.

Estándar IEEE 802.3at/af. Estándares IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab e IEEE 802.3z

Protección contra sobretensiones de 6kV para puertos PoE

Administración de energía PoE

Acceso a la red Gigabit

Reenvío a velocidad de cable

Conmutación de almacenamiento y reenvío

Carcasa metálica sólida de alta resistencia


▪ Specification

Model		DS-3E0526P-E/M
General	Shell	Metal material
	Net Weight	2.92 kg (6.44 lb)
	Gross Weight	4.12 kg (9.08 lb)
	Dimensions (W × H × D)	440 mm × 44 mm × 220.8 mm (17.3" × 1.7" × 8.7")
	Operating Temperature	0 °C to 45 °C (32 °F to 113 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	100-240 V AC, 50/60 Hz, Max. 4 A;
	Max. Power Consumption	250 W
	Power Consumption in Idle	25 W
	Installation Mode	Rack (equipped with mounting ears)
	Surge Protection	6 kV
Network Parameters	Ports	24 × Gigabit PoE port, 2 × Gigabit fiber optical port
	MAC Address Table	8 K
	Switching Capacity	52 Gbps
	Packet Forwarding Rate	38.69 Mpps
	Internal Cache	4.1 Mbits
PoE Power Supply	PoE Standard	IEEE 802.3af; IEEE 802.3at;
	PoE Power Pin	End-span: 1/2(+), 3/6(-)
	PoE Port	PoE: Ports 1 to 24
	Max. Port Power	30 W
	PoE Power Budget	225 W
Approval	EMC	FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020), RCM (AS/NZS CISPR 32: 2015)
	Safety	UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No.1907/2006)

▪ Available Model

DS-3E0526P-E/M

Dimension

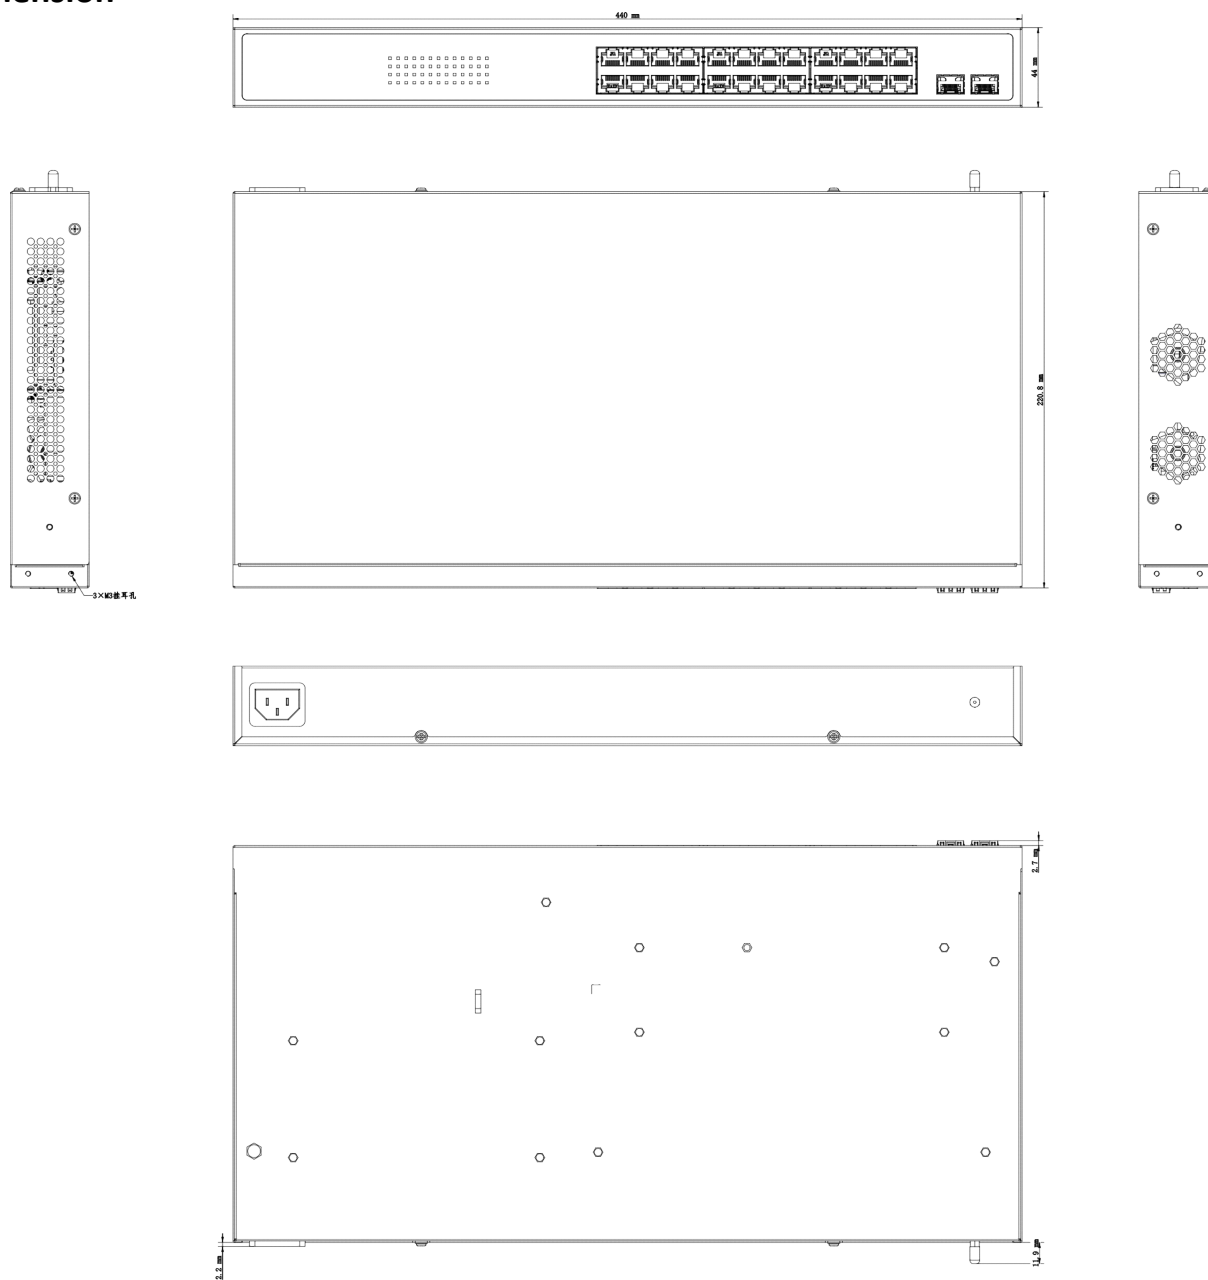

▪ **Accessory**

▪ **Optional**

HK-SFP-1.25G-20-1550 SFP Module	HK-SFP-1.25G-20-1310 SFP Module	HK-SFP-1.25G-1310-DF-MM SFP Module	HK-SFP-1.25G-20-1310-DF SFP Module
			

www.rosarioseguridad.com.ar

 ventas@rosarioseguridad.com.ar

  +54 9 341 6708000

  +54 9 341 6799822

 [rosarioseguridadok](https://www.instagram.com/rosarioseguridadok)

 [Rosario Seguridad](https://www.youtube.com/RosarioSeguridad)

 [Rosario Seguridad](https://www.facebook.com/RosarioSeguridad)

Grupo Instaladores

 <https://www.facebook.com/groups/591852618012744/>

  +54 9 341 6591429

  +54 9 341 4577532

Avenida Pellegrini 4820 - Rosario - Santa Fe - Argentina

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq