TAKEX

SECURITY SENSORS

TAKEX is a leading Japanese manufacturer of Security Sensors, specializing in Active Infrared Beams for Perimeter Protection, and Outdoor PIR for CCTV activation and Intruder Detection. With more than 50 years of engineering experience, we are proud to be specified at the highest level of Royal, Government and Military organizations worldwide.

PHOTOELECTRIC BEAMS

PASSIVE INFRARED SENSORS

FLAME SENSORS

GLASS BREAK SENSORS

DOOR SENSORS

ATTENTION SENSORS

ROSARIO SEGURIDAD

CONTENTS

PHOTOELECTRIC BEAMS

QUAD BEAMS	03
ANTI-CRAWL BEAMS	04
BATTERY BEAM	05
TOWER BEAMS	05-06
TWIN BEAMS	07
LOW-CURRENT BEAM	08
LONG RANGE BEAMS	08
REFLECTIVE BEAMS	08-09
MINIATURE BEAMS	10
INTERFACE MODULE	10
BEAM TOWERS	11
BEAM ACCESSORIES	12
TOWER ACCESSORIES	12

PASSIVE INFRARED SENSORS

DUAL-ZONE PIR	13
BATTERY PIR	13-14
HIGH PERFORMANCE PIR	14-15
MEDIUM RANGE PIR	15
MULTI-PATTERN PIR	15
CEILING MOUNT PIR	16-18
WALL MOUNT PIR	19-20
OUTDOOR PIR ACCESSORIES	21
INDOOR PIR ACCESSORIES	21

FLAME SENSORS

INDOOR FLAME SENSORS	22
OUTDOOR FLAME SENSORS	23
FLAME SENSOR ACCESSORIES	23

GLASS BREAK SENSORS

GLASS BREAK SENSORS	24
GLASS BREAK ACCESSORIES	24

DOOR SENSORS

AUTO DOOR SENSORS	25
REQUEST-TO-EXIT	25

ATTENTION SENSORS

ATTENTION SENSORS	26
INDEX	27

PRODUCT ICON KEY

The product complies with EU safety, health and environmental requirements.	CE
The product complies with ACMA regulatory requirements for network integrity, interoperability, performance characteristics, and health & safety.	
The product is Listed by UL. Representative samples of the product have been evaluated by UL and meet applicable safety standards.	
The product is available in the regions as indicated: E ME A = Europe, Middle East, and Africa ME A = Middle East, and Africa only	E ME A
Access the full product data sheet by scanning the QR code with your mobile device.	

www.takex.com
ROSARIO SEGURIDAD

PXB-50HF	PXB-100HF	PXB-200HF
50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

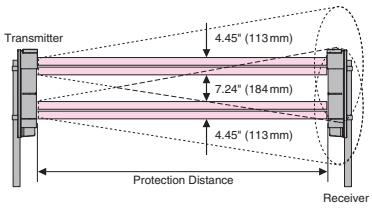

FEATURES

- 4 x synchronized high power beams
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Lightning and surge protection up to 15kV
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±20° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP65 housing

Detection System	Near infrared pulsed beam interruption system (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output form C Contact action: Interruption time (Min.2sec.) Contact capacity: 30V (AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	12 to 30V DC (Non-polarity)
Current Consumption	30mA to 34mA
Features	• Double modulation beam • Wide beam separation • Upper/lower beam switch • Response time adjustment
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
Optional	Pole cover, Pole-side cover, Heater
External Dimensions - WHD	114 x 450 x 100mm (4.49 x 17.72 x 3.94")
IP Rating	65
Weight - TR/RE	1.4kg (49oz) / 1.47kg (51.5oz)

PB-IN-50HFA	PB-IN-100HFA	PB-IN-200HFA
50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

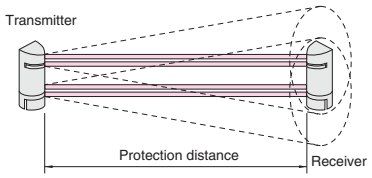

FEATURES

- 4 x synchronized high power beams
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Environmental monitoring circuit
- Vivid internal body stickers aid beam alignment procedure
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared pulsed beam interruption system (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output: 1c Reset time: Interruption time (Min. 2sec) 30V (AC/DC) 1A Max
Supply Voltage	12 to 30V DC (non-polarity)
Current Consumption	95mA to 120mA
Features	• Double modulation beam • Beam power selection • Auto-gain lock • Frost proof cover
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
Optional	Pole cover, Pole attachment, Pole-side cover, Heater, Flush mount housing
External Dimensions - WHD	104 x 390 x 98mm (4.09 x 15.35 x 3.86")
IP Rating	55
Weight - TR/RE	1.2kg (42oz) / 1.3kg (45.5oz)

PXB-50F	PXB-100F	PXB-200F
50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

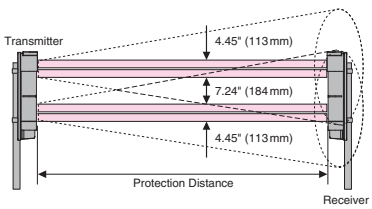

FEATURES

- 4 x synchronized high power beams
- Double modulation for unsurpassed light immunity
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Lightning and surge protection up to 15kV
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±20° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP65 housing

Detection System	Near infrared pulsed beam interruption (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output form C Contact action: Interruption time (Min.2 sec.) Contact capacity: 30V (AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	12 to 30V DC (Non-polarity)
Current Consumption	30mA to 34mA
Features	• Double modulation beam • Wide beam separation • Upper/lower beam switch • Response time adjustment
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
Optional	Pole cover, Pole-side cover, Heater
External Dimensions - WHD	114 x 450 x 100mm (4.49 x 17.72 x 3.94")
IP Rating	65
Weight - TR/RE	1.4kg (49oz) / 1.47kg (51.5oz)

ROSARIO SEGURIDAD

ANTI-CRAWL BEAMS

Designed to be used in the highest security applications, such as Prisons, Military Compounds, Nuclear Facilities, or any other high risk sites where protection is paramount.

PB-50FA	PB-100FA	PB-200FA
50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

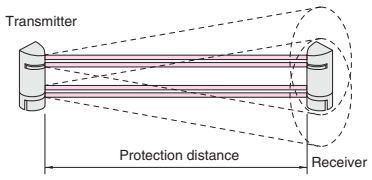

FEATURES

- 4 x synchronized high power beams
- Double modulation for unsurpassed light immunity
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared pulsed beam interruption system (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output N.O./N.C. selectable Reset time: Interruption time (Min. 2sec) 30V (AC/DC) 1A Max
Supply Voltage	12 to 30V DC (non-polarity)
Current Consumption	95mA to 120mA
Features	• Double modulation beam • Frost proof cover
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
Optional	Pole cover, Pole attachment, Pole-side cover, Heater, Flush mount housing
External Dimensions - WHD	104 x 390 x 98mm (4.09 x 15.35 x 3.86")
IP Rating	55
Weight - TR/RE	1.2kg (42oz) / 1.3kg (45.5oz)

PB-IN-100AT
100m (330ft) outdoor

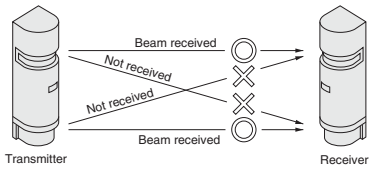

FEATURES

- Anti-crawl beam for high-security applications
- Independent activation of upper or lower beams
- Dual response time system
- Double modulation for unsurpassed light immunity
- 4 selectable beam channels to prevent crosstalk
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared pulsed beam interruption system (Anti-crawling)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 1,5sec) 30V (AC/DC) 1A Max
Supply Voltage	12 to 30V DC (non-polarity)
Current Consumption	85mA
Features	• Double modulation beam • Auto-gain lock • Dual response time system
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Optional	Pole cover, Pole attachment, Pole-side cover, Heater
External Dimensions - WHD	104 x 390 x 98mm (4.09 x 15.35 x 3.86")
IP Rating	55
Weight - TR/RE	1.2kg (42oz) / 1.3kg (45.5oz)

PXB-100ATC
100m (330ft) outdoor

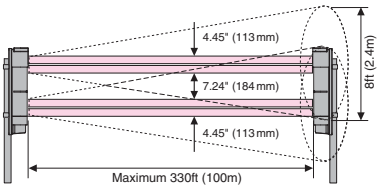

FEATURES

- Independent control of upper and lower beams
- Choose between synchro-quad and anti-crawl operation
- Dual outputs for crawl attempt and full beam break
- Sync wire allows unlimited stacking without crosstalk
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Lightning and surge protection up to 15kV
- ±90° horizontal ±20° vertical adjustable sensor heads
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- 50,000 lux sunlight immunity
- IP65 housing

Detection System	Near infrared pulsed beam interruption system (Anti-crawling)
Alarm Output	Dry contact relay output N.O./N.C. selectable Contact action: Interruption time (Min.2sec.) Contact capacity: 30V (AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	12 to 30V DC (Non-polarity)
Current Consumption	Transmitter: 27mA Receiver: 48mA
Features	• Double modulation beam • Wide beam separation • Upper/lower beam switch
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
Optional	Pole cover, Pole-side cover, Heater
External Dimensions - WHD	114 x 450 x 100mm (4.49 x 17.72 x 3.94")
IP Rating	65
Weight - TR/RE	1.4kg (49oz) / 1.5kg (52.5oz)

ROSARIO SEGURIDAD

BATTERY BEAM

Designed for compatibility with leading wireless systems; reducing the time and cost of permanent installations and allowing the use of Active Infrared Beams on rapid deployment or temporary installations.

TXF-125E

25m (82ft)	50m (165ft)	75m (245ft)	100m (330ft)

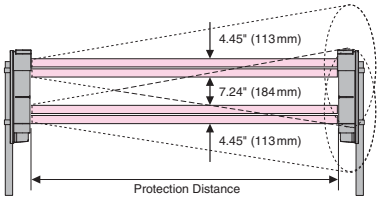

FEATURES

- 4 x synchronized high power beams
- 4 selectable operation ranges
- 4 selectable beam channels to prevent crosstalk
- Up to 5 year battery life using 2 x LS 33600 (3.6V 17Ah) batteries per unit
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- ±90° horizontal ±20° vertical adjustable sensor heads
- Environmental monitoring circuit
- IP65 housing

Detection System	Near infrared pulsed beam interruption (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output form C Contact capacity: DC 30V 0.1A (resistive load)
Supply Voltage	3.6V DC (SAFT LS33600 recommended)
Features	• Single modulation beam • Wide beam separation • Upper/lower beam switch • Battery saving • Repeat output • Battery sharing
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Optional	Pole cover
External Dimensions - WHD	114 x 450 x 135mm (4.49 x 17.72 x 5.90")
IP Rating	65
Weight - TR/RE	1.5kg (52.5oz) / 1.55kg (54.3oz)

TOWER BEAMS

Designed specifically for use in our TA Series Tower Enclosures, supplied with mounting brackets for fast, trouble-free assembly.

TXF-125E-KH

100m (330ft) outdoor

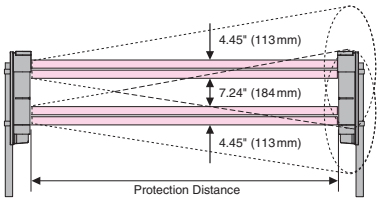

FEATURES

- Specifically designed for use in TA series Tower Enclosures
- 4 x synchronized high power beams
- 4 selectable operation ranges
- 4 selectable beam channels to prevent crosstalk
- Up to 5 year battery life using 2 x LS 33600 (3.6V 17Ah) batteries per unit
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- ±90° horizontal ±20° vertical adjustable sensor heads
- Environmental monitoring circuit

Detection System	Near infrared pulsed beam interruption (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output form C Contact capacity: DC 30V 0.1A (resistive load)
Supply Voltage	3.6V DC (SAFT LS33600 recommended)
Features	• Single modulation beam • Upper/lower beam switch • Wide beam separation • Battery saving • Repeat output • Battery sharing
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)

PXB-50HF-KH | PXB-100HF-KH | PXB-200HF-KH

50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

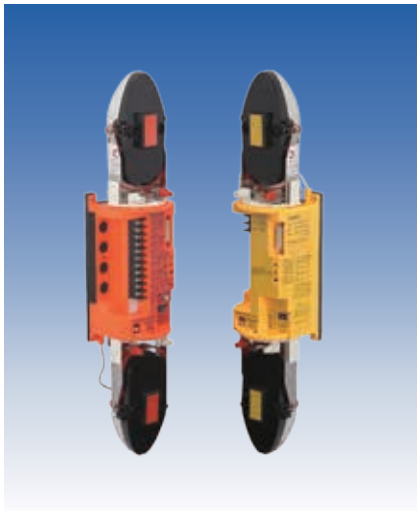

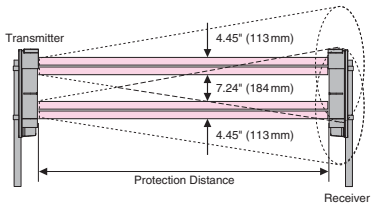

FEATURES

- Specifically designed for use in TA series Tower Enclosures
- 4 x synchronized high power beams
- Double coated electronics for demanding environments
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Lightning and surge protection up to 15kV
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±20° vertical adjustable sensor heads
- 50,000 lux sunlight immunity

Detection System	Near infrared pulsed beam interruption system (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output form C Contact action: Interruption time (Min.2sec.) Contact capacity: 30V (AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	12 to 30V DC (Non-polarity)
Current Consumption	30mA to 34mA
Features	• Double modulation beam • Wide beam separation • Upper/lower beam switch • Response time adjustment
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)

DIGITAL SEGURIDAD

PB-50HF/A-KH	PB-100HF/A-KH	PB-200HF/A-KH
50m (165ft) outdoor	100m (330ft) outdoor	200m (660ft) outdoor

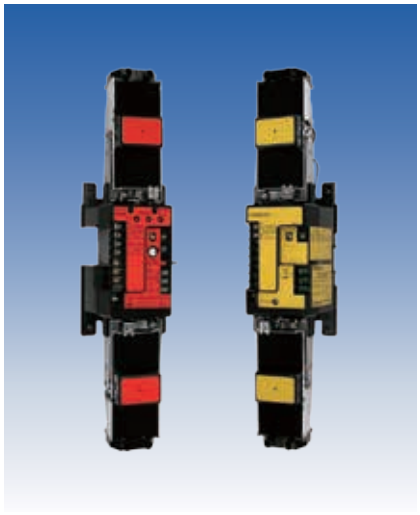

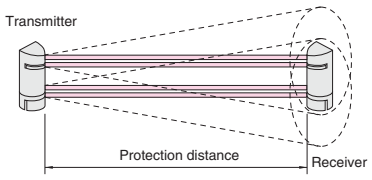

FEATURES

- Specifically designed for use in TA series Tower Enclosures
- 4 x synchronized high power beams
- Double coated electronics for demanding environments
- Supplied with 'Quick fix' mounting brackets for easy adjustment
- 4 selectable beam channels to prevent crosstalk
- Environmental monitoring circuit
- Vivid body stickers aid beam alignment procedure
- Double modulation for unsurpassed light immunity
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity

Detection System	Near infrared pulsed beam interruption system (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output: 1c Reset time: Interruption time (Min. 2sec) 30V (AC/DC) 1A Max
Supply Voltage	12 to 30V DC (non-polarity)
Current Consumption	60mA to 85mA
Features	• Double modulation beam • Beam power selection • Auto-gain lock • Frost proof cover
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)

PXB-100ATC-KH

100m (330ft) outdoor

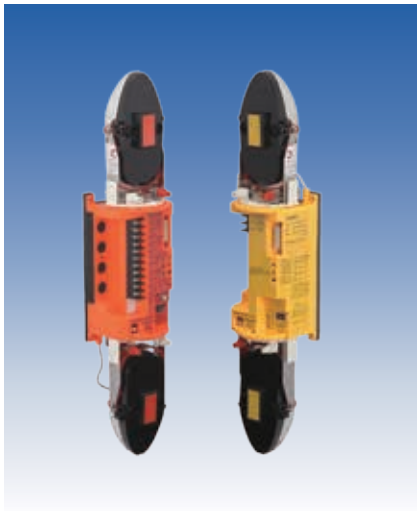

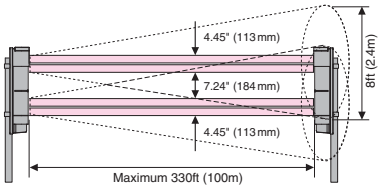

FEATURES

- Specifically designed for use in TA series Tower Enclosures
- Independent control of upper and lower beams
- Double coated electronics for demanding environments
- Synchro-quad and anti-crawl operation
- Dual outputs for crawl attempt and full beam break
- Sync wire allows unlimited stacking without crosstalk
- 4 selectable beam channels to prevent crosstalk
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Double modulation for unsurpassed light immunity
- Lightning and surge protection up to 15kV
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±20° vertical adjustable sensor heads
- 50,000 lux sunlight immunity

Detection System	Near infrared pulsed beam interruption system (Anti-crawling)
Alarm Output	Dry contact relay output N.O/N.C. selectable Contact action: Interruption time (Min.2sec.) Contact capacity: 30V (AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	12 to 30V DC (Non-polarity)
Current Consumption	Transmitter: 27mA Receiver: 48mA
Features	• Double modulation beam • Wide beam separation • Upper/lower beam switch • Response time adjustment
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)

PB-100AT-KH

100m (330ft) outdoor

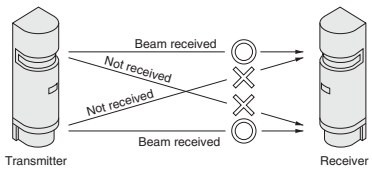

FEATURES

- Specifically designed for use in TA series Tower Enclosures
- Anti-crawl beam for high-security applications
- Independent activation of upper or lower beams
- Double coated electronics for demanding environments
- Supplied with 'Quick fix' mounting brackets for easy adjustment
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity

Detection System	Near infrared pulsed beam interruption system (Anti-crawling)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 1.5sec) 30V (AC/DC) 1A Max
Supply Voltage	12 to 30V DC (non-polarity)
Current Consumption	85mA
Features	• Double modulation frequency • Auto-gain lock • Dual response time system
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)

ROSARIO SEGURIDAD

TWIN BEAMS

TAKEX Twin Beams feature our patented 'double modulation' technology giving them an unsurpassed immunity to sunlight and artificial light sources - ideal for protecting windows, doors, fence lines, entrances and driveways.

PB-20TE	PB-40TE	PB-60TE
20m (66ft) outdoor	40m (135ft) outdoor	60m (200ft) outdoor

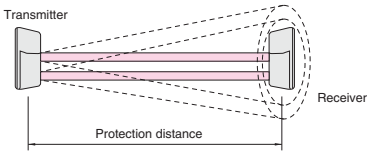

FEATURES

- 2 x synchronized high power beams
- 4 selectable beam channels to prevent crosstalk
- Vivid body stickers aid beam alignment procedure
- Double modulation for unsurpassed light immunity
- Auto-gain control (AGC)
- Monitor jack output
- Frost-proof cover
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared (through type)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 1 - 3sec) 30V (AC/DC) 0.5 A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	55mA to 80mA
Features	• Double modulation beam • Frost proof cover • AGC circuit • Monitor jack output
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Mounting Position	Outdoor, indoor
Optional	Pole cover, Pole attachment, Heater
External Dimensions - WHD	73 x 170 x 71.5mm (2.87 x 6.69 x 2.81")
IP Rating	54
Weight - TR/RE	380g (13.3oz) / 400g (14oz)

PB-30TK	PB-60TK	PB-100TK
30m (100ft) outdoor	60m (200ft) outdoor	100m (330ft) outdoor

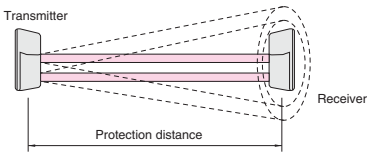

FEATURES

- 2 x synchronized high power beams
- Double modulation for unsurpassed light immunity
- Auto-gain control (AGC)
- Monitor jack output
- Frost-proof cover
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared (through type)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 1 - 3sec) 30V (AC/DC) 0.5 A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	53mA to 80mA
Features	• Double modulation beam • Frost proof cover • AGC circuit • Monitor jack output
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Mounting Position	Outdoor, indoor
Optional	Pole cover, Pole attachment, Heater
External Dimensions - WHD	73 x 170 x 71.5mm (2.87 x 6.69 x 2.81")
IP Rating	54
Weight - TR/RE	380g (13.3oz) / 400g (14oz)

PB-100ST
100m (330ft) outdoor

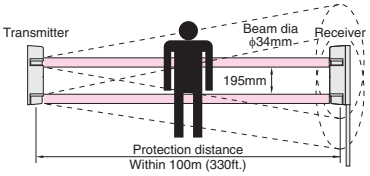

FEATURES

- 2 x synchronized high power beams
- Double modulation for unsurpassed light immunity
- Auto-gain control (AGC)
- Monitor jack output
- Frost-proof cover
- ±90° horizontal ±10° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared pulsed beam interruption system (TR-RE 2 beam simultaneous interruption)
Alarm Output	Dry contact relay output: 1 c Reset time: Detection time + delay time (approx. 1 sec) 30V (AC/DC) 0.5A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	80mA or less
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Optional	Pole cover, Pole attachment, Pole-side cover, Heater, Flush mount housing
External Dimensions - WHD	104 x 390 x 98mm (4.09 x 15.35 x 3.86")
IP Rating	55
Weight - TR/RE	1.2kg (42oz) / 1.2kg (42oz)

ROSARIO SEGURIDAD

LOW-CURRENT BEAM

Designed specifically for low-current, low-voltage use, particularly suitable for difficult-to-cable-to sites without (or unstable) power.

PXB-100SW

100m (330ft) outdoor

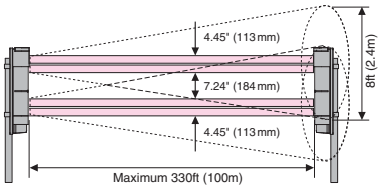

FEATURES

- Low-current beam for battery or solar operation
- 4 x high power beams
- 4 selectable beam channels to prevent crosstalk
- Double modulation for unsurpassed light immunity
- Increased beam separation minimizes nuisance alarms
- Vivid internal color aids beam alignment procedure
- Lightning and surge protection up to 15kV
- Environmental monitoring circuit
- Dynamic auto-gain lock (AGL)
- ±90° horizontal ±20° vertical adjustable sensor heads
- 50,000 lux sunlight immunity
- IP65 housing
- Optional BA-6SLA solar panel kit available

Detection System	Near infrared pulsed beam interruption (TR-RE 4 beam simultaneous interruption)
Alarm Output	Dry contact relay output N.O./N.C. selectable Contact action: Interruption time (Min.2 sec.) Contact capacity: 30V(AC/DC) 1A (resistive load) Protective resistor
Supply Voltage	5 to 30V DC (with polarity)
Current Consumption	5V to 8V DC: 6mA (TR 3.7/RE 2.3mA) or less when armed 10V to 30V DC: 8.3mA (TR 5.2/RE 3.1 mA) or less when armed
Ambient Temperature	-35°C to +66°C (-31°F to +151°F)
External Dimensions - WHD	114 x 450 x 100mm (4.49 x 17.72 x 3.94")
IP Rating	65
Weight - TR/RE	1.5kg (52.9oz) / 1.55kg (54.7oz)

LONG RANGE BEAMS

PH-200SE

200m (660ft) outdoor

PH-600SE

600m (1,980ft) outdoor



FEATURES

- Modulated pulsed high power beam
- Single beam/synchronized twin operation possible using optional module
- 4 set stacked/linear protection
- Quick Beam Alignment
- Anti-malfunction circuit
- External environmental diagnostic function

Detection System	Near infrared (through type)
Alarm Output	Dry contact relay output: N/C Reset time: Detection time + delay time (approx. 2sec) 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 30V DC (non-polarity)
Current Consumption	45mA
Ambient Temperature	-25°C to +55°C (-13°F to +131°F)
Mounting Position	Outdoor, indoor
Optional	SEC Circuit, Long hood
External Dimensions - WHD	124 x 170 x 240mm (5 x 6.66 x 3.66") (PH-200SE)
Weight - PH-200SE/600SE	2kg (4.4lb) / 8kg (17.6lb) per TR/RE

REFLECTIVE BEAMS

The single-ended nature of our reflective beams make them ideal for short distance monitoring across entrances and exits, corridors and staircases.

PR-1B

1m (3.3ft) indoor

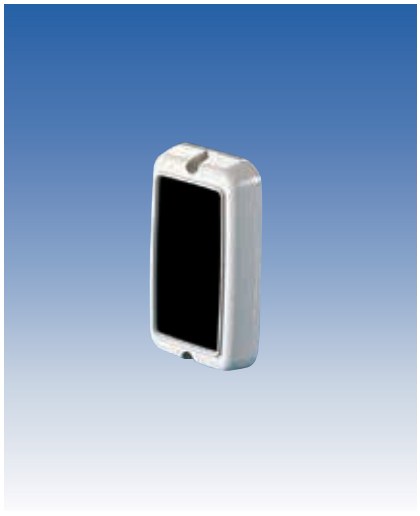

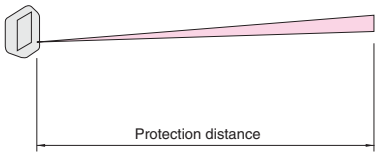

FEATURES

- Motionless objects can be detected
- Direct reflection system (no reflector required)
- Cable only to one end: for applications where a beam break is desirable but wiring to both ends is impractical
- Slim and compact size
- Snap off/on terminal cover for easy wiring

Detection System	Near infrared (direct reflection type)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 0.5sec) 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 22V DC (non-polarity)
Current Consumption	60mA
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor
Optional	Flush mount plate, L bracket
External Dimensions - WHD	62 x 106 x 23.5mm (2.44 x 4.17 x 0.93")
Weight	75g (2.6oz)

ROSARIO SEGURIDAD

PR-5B

5m (16.5ft) indoor

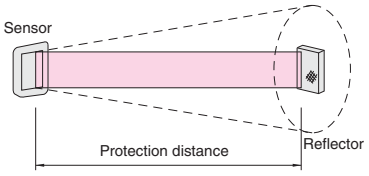

FEATURES

- Reflection type
- Cable only to one end: for applications where a beam break is desirable but wiring to both ends is impractical
- Ideal for short distance protection across entrances and exits, corridors and staircases
- Slim and compact size
- Snap off/on terminal cover for easy wiring

Detection System	Near infrared (reflection type)
Alarm Output	Dry contact relay output: 1c Reset time: Detection time + delay time (approx. 1sec) 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 26V DC (non-polarity)
Current Consumption	37mA
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor
Optional	Flush mount plate, L bracket
External Dimensions - WHD	62 x 106 x 23.5mm (2.44 x 4.17 x 0.93")
Weight - SENS/REFL	90g (3.2oz) / 50g (1.8oz)

PR-10B / PR-10BU

PR-10B	PR-10BU
10m (33ft) indoor	10m (33ft) indoor

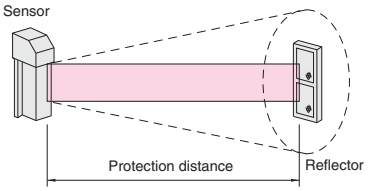

FEATURES

- Reflection type
- Cable only to one end: for applications where a beam break is desirable but wiring to both ends is impractical
- ±90° horizontal adjustable sensor head
- Surface mount (PR-10B) and flush mount (PR-10BU) types available

Detection System	Near infrared (reflection type)
Alarm Output	Dry contact relay output: N/C Reset time: approx. 1sec 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 15V DC (non-polarity)
Current Consumption	30mA
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor
Optional	L bracket
External Dimensions - WHD	62 x 157 x 62mm (2.44 x 6.18 x 2.44")
Weight - PR-10B	220g (7.7oz)

PR-11BE

11m (36ft) outdoor

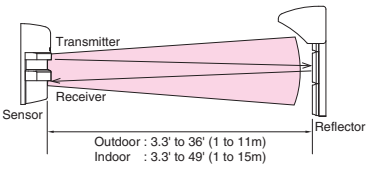

FEATURES

- Reflection type
- Cable only to one end: for applications where a beam break is desirable but wiring to both ends is impractical
- Suitable for both indoor and outdoor use
- Monitor jack output
- Frost-proof cover
- ±90° horizontal ±10° vertical adjustable sensor head
- 50,000 lux sunlight immunity
- IP55 housing

Detection System	Near infrared (reflection type)
Alarm Output	Dry contact relay output: N/O or N/C selectable 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 30V DC (non-polarity)
Current Consumption	55mA
Features	• Tamper output • Monitor jack output
Ambient Temperature	-25°C to +60°C (-13°F to +140°F)
Mounting Position	Outdoor/ Indoor
External Dimensions - WHD	73 x 170 x 71.5mm (2.87 x 6.69 x 2.81")
Weight - SENS/REFL	430g (15oz) / 490g (17oz)

ROSARIO SEGURIDAD

PB-10NS

10m (33ft) indoor



FEATURES

- Single beam
- Miniaturized control box
- Sensor cord can be cut to length as required
- Supplied with flush mounting plates for sensor heads
- Ideal for discreet/covert/prestige applications
- Built-in sensitivity adjustment

Detection System	Near infrared (through type)
Alarm Output	Dry contact relay output: N/O or N/C selectable Reset time: Detection time + delay time (approx. 1sec.) 30V (AC/DC) 0.3A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	45mA or less
Ambient temperature	-25°C to +55°C (-13°F to +131°F)
Mounting Position	Indoor or semi-outdoor
External Dimensions - WHD	SENS: 15 dia. x 16mm (0.59 dia. x 0.63") AMP: 45 x 120 x 29mm (1.77 x 4.72 x 1.14")
Weight - SENS/AMP	120g (4.2oz) inc. cable / 95g (3.3oz)

PB-10TNS

10m (33ft) indoor



FEATURES

- Twin beam
- AND/OR operation mode
- Miniaturized control box
- Sensor cord can be cut to length as required
- Supplied with flush mounting plates for sensor heads
- Ideal for discreet/covert/prestige applications
- Built-in sensitivity adjustment

Detection System	Near infrared (through type)
Alarm Output	Dry contact relay output: N/O or N/C selectable Reset time: Detection time + delay time (approx. 1 sec.) 30V (AC/DC) 0.3A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	55mA or less
Ambient Temperature	-25°C to +55°C (-13°F to +131°F)
Mounting Position	Indoor or semi-outdoor
External Dimensions - WHD	SENS: 15 dia. x 16mm (0.59 dia. x 0.63") AMP: 45 x 120 x 29mm (1.77 x 4.72 x 1.14")
Weight - SENS/AMP	120g (4.2oz) inc. cable / 95g (3.3oz)

INT-QUADIP

IP module

FEATURES

- IP interface module
- PoE Class 3
- IEEE 802.3af
- VMS compatible
- Supported cameras for direct control include:
  - Axis
  - Bosch
  - Ernitec
  - Hikvision
  - Sony
- Plug & play web browser interface
- No software or installation required
- Designed for PB-IN-HF/HFA, PB-F/FA, PB-IN-100AT, PB-100ST, PB-KH & PB-IN-75SW series
- One cable installation

Alarm Output	Over IP + Digital output: N.C. 30V (AC/DC) 100mA Max
Alarm Input	Alarm Tamper Environmental Heater Adaptor
Input supply voltage	Ethernet IEEE 802.3af/at, TCP/IP
Output supply voltage	Power over Ethernet, class 3 (max 13W)
Supported VMS Software	• Axis Camera Companion • Bosch VMS • Embsec Visualiser • Genetec Omnicast • Griffid GMS & GMC • Kentima Ethiris • Milestone Xprotect • Mirasys Carbon VMS • SeeTec Enterprise & Probox
Optional	Heater adaptor (TBA)
External Dimensions - WHD	59 x 67 x 16mm (2.32 x 2.64 x 0.63")
Weight	20g (0.7oz)

ROSARIO SEGURIDAD

BEAM TOWERS

For additional security, or to disguise the mounting height and number of beams from observers, our TA Series Beam Towers comprise of attractive but rugged Wall or Floor-mount units, with Single and Double-Sided variants.

TAD100	TAD150	TAD200	TAD300
1m (3.3ft)	1.5m (5ft)	2m (6.6ft)	3m (10ft)



FEATURES

- Double sided floor mount beam tower enclosure
- 360 degree field of view
- Compatible with PB-KH beams
- Disguises mounting height/position of beams
- Anodized aluminum column
- Tamper protected lid to prevent unauthorized interference
- Vandal resistant polycarbonate covers

Protection Range	360°
Mounting	Standalone, Floor Mounted
Exterior	Vandal / UV resistant Polycarbonate
Interior	Oxidized Aluminum
Designed for	• PXB-50/100/200HF-KH • PB-50/100/200HF/A-KH • PXB-100ATC-KH • PB-100AT-KH • TXF-125E-KH
Compatible with	• PXB-50/100/200HF • PB-IN-50/100/200HFA • PXB-50/100/200F • PB-50/100/200FA • PXB-100ATC • PB-IN-100AT • PB-100ST • PB-20/40/60TE • PB-30/60/100TK
Included Accessories	Tamper Switch Side Brackets Mounting Kit
IP Rating	54

TAS100	TAS150	TAS200	TAS300
1m (3.3ft)	1.5m (5ft)	2m (6.6ft)	3m (10ft)



FEATURES

- Single sided floor mount beam tower enclosure
- 180 degree field of view
- Compatible with PB-KH beams
- Disguises mounting height/position of beams
- Anodized aluminum column
- Tamper protected lid to prevent unauthorized interference
- Vandal resistant polycarbonate covers

Protection Range	180°
Mounting	Standalone, Floor Mounted
Exterior	Vandal / UV resistant Polycarbonate
Interior	Oxidized Aluminum
Designed for	• PXB-50/100/200HF-KH • PB-50/100/200HF/A-KH • PXB-100ATC-KH • PB-100AT-KH • TXF-125E-KH
Compatible with	• PXB-50/100/200HF • PB-IN-50/100/200HFA • PXB-50/100/200F • PB-50/100/200FA • PXB-100ATC • PB-IN-100AT • PB-100ST • PB-20/40/60TE • PB-30/60/100TK
Included Accessories	Tamper Switch Side Brackets Mounting Kit
IP Rating	54

TAW100	TAW150	TAW200	TAW300
1m (3.3ft)	1.5m (5ft)	2m (6.6ft)	3m (10ft)

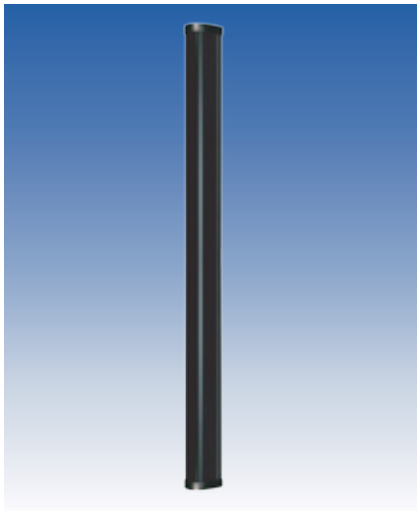



FEATURES

- Single sided wall mount beam tower enclosure
- 180 degree field of view
- Compatible with PB-KH beams
- Disguises mounting height/position of beams
- Anodized aluminum column
- Tamper protected lid to prevent unauthorized interference
- Vandal resistant polycarbonate covers

Protection Range	180°
Mounting	Wall Mounted
Exterior	Vandal / UV resistant Polycarbonate
Interior	Oxidized Aluminum
Designed for	• PXB-50/100/200HF-KH • PB-50/100/200HF/A-KH • PXB-100ATC-KH • PB-100AT-KH • TXF-125E-KH
Compatible with	• PXB-50/100/200HF • PB-IN-50/100/200HFA • PXB-50/100/200F • PB-50/100/200FA • PXB-100ATC • PB-IN-100AT • PB-100ST • PB-20/40/60TE • PB-30/60/100TK
Included Accessories	2 x Tamper Switch Side Brackets Mounting Kit
IP Rating	54

ROSARIO SEGURIDAD

BA-6SLA
Solar panel kit
For:
- PXB-100SW



BH-200
Long hood
For:
- PH-200SE/600SE

BL-5
BL-10
L fittings
For:
- PR-1B/5B (BL-5)
- PR-10B (BL-10)

BL-11
L fitting
For:
- PR-11BE

BP-5B
BP-5D
Flush mount plate (sensor)
For:
- PR-1B
- PR-5B

BP-5C
Flush mount plate (reflector)
For:
- PR-5B

BP-60A
Pole attachment
For:
- PB-20/40/60TE
- PB-30/60/100TK

BP-60TE
Pole cover
For:
- PB-20/40/60TE
- PB-30/60/100TK

BP-200F
Pole cover
For:
- PB-IN-50/100/200HFA
- PB-50/100/200FA
- PB-IN-100AT
- PB-100ST

BP-200X
Pole cover
For:
- PXB-50/100/200HF
- PXB-50/100/200F
- TXF-125E
- PXB-100ATC
- PXB-100SW

BR-5
BR-10
Reflector
For:
- PR-5B (BR-5)
- PR-10B/BU (BR-10)

BS-50F
Pole side cover
For:
- PB-IN-50/100/200HFA
- PB-50/100/200FA
- PB-IN-100AT
- PB-100ST

BS-50X
Pole side cover
For:
- PXB-50/100/200HF
- PXB-50/100/200F
- PXB-100ATC
- PXB-100SW

BU-50F
Flush mount housing
For:
- PB-IN-50/100/200HF
- PB-50/100/200FA
- PB-IN-100AT
- PB-100ST

ER-02
Wireless alignment checker
For:
- PXB-50/100/200HF
- PXB-50/100/200F
- TXF-125E
- PXB-100ATC
- PXB-100SW



HTF-24AE
24VDC Heater kit
For:
- PXB-50/100/200HF
- PXB-50/100/200F
- PXB-100ATC



HTF-24E
24VDC Heater kit
For:
- PB-IN-50/100/200HFA
- PB-50/100/200FA
- PB-IN-100AT
- PB-100ST

PBH
12-24VDC Heater kit
For:
- PB-IN-50/100/200HFA
- PB-50/100/200FA
- PB-IN-100AT
- PB-20/40/60TE
- PB-30/60/100TK

PTS
Thermostat
For:
- TAD series
- TAS series
- TAW series



TADTOP
TASTOP
Replacement top/bottom cap
For:
- TAD series (TADTOP)
- TAS/TAW series (TASTOP)

TAFB
First-fix bolt set
For:
- TAD series
- TAS series

TAH
12/24VDC Heater (250mA)
For:
- TAD series
- TAS series
- TAW series

TAKH
Beam mounting brackets
For:
- PB-50/100/200HF/A-KH
- PB-100AT-KH
- PXB-50/100/200HF-KH
- PXB-100ATC-KH
- TXF-125E-KH

TANCK
Polycarbonate joining strip
For:
- TAD series
- TAS series
- TAW series

TAPS
Anti-climb tamper switch
For:
- TAD series
- TAS series
- TAW series

TA-PSU2A
12VDC 2A Power supply
For:
- TAD series
- TAS series
- TAW series

TC100/150/200/300
Polycarbonate cover
For:
- TAD series
- TAS series
- TAW series

ROSARIO SEGURIDAD

DUAL-ZONE PIR

Takex 'Dual-Zone' PIR's, combine a horizontal curtain with a downward curtain, both of which need to be activated simultaneously for an alarm. With up to 180° x 12m range these sensors are perfect for use in both domestic and industrial applications

MS-12TE	MS-12FE
12m (40ft) x 90°	12m (40ft) x 180°

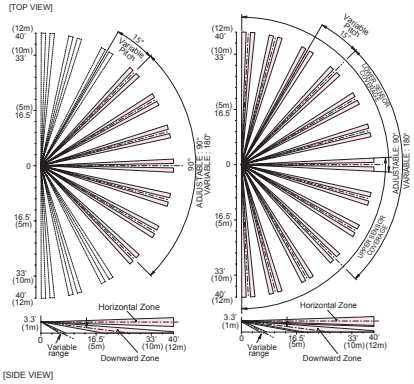

FEATURES

- Dual-zone detection system
- 2 to 12m (6.6 to 40ft) coverage
- Rotating sensor heads (±90° horizontal adjustment)
- Selectable NO/NC relay output with 2sec-5min timer
- AND/OR detection modes (MS-12FE only)
- IP54 housing

Model	MS-12TE	MS-12FE
Detection System	Passive infrared	
	Twin	Twin x 2
Alarm Output	Dry contact relay output: N/C or N/O selectable 30V (AC/DC) 0.5A Max Reset time: approx 2sec. ~ 5min.	
Supply Voltage	12 to 30V DC (non-polarity)	
Current Consumption	35mA	40mA
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)	
Mounting Position	Indoor or Outdoor	
External Dimensions - WHD	80 x 234 x 91mm (3.15 x 9.22 x 3.58")	
IP Rating	54	
Weight	390g (13.8oz)	470g (16.6oz)

OMS-12FE
12m (40ft) x 180°

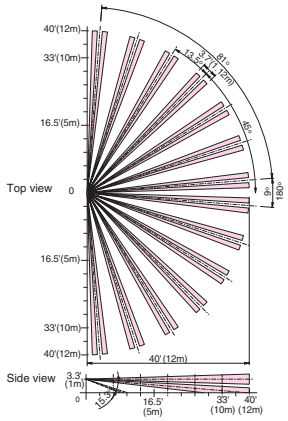

FEATURES

- Dual-zone detection system
- 3 to 12m (10 to 40ft) coverage
- Fixed sensor heads
- Supplied masking sheets allow precise area control
- Front and back tampers
- IP54 housing

Detection System	Passive infrared (Twin x 2)
Alarm Output	Dry contact relay output N.C./N.O. selectable • Contact capacity: 30V AC/DC 0.2A MAX. (Resistive load) • Contact operation: Detection time (2sec)
Tamper Output	Dry contact relay output N.C. Contact capacity: 30V (AC/DC), 0.1A MAX. (Resistive load)
Supply Voltage	9 to 28V DC (non-polarity)
Current Consumption	20mA Max
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
External Dimensions - WHD	94 x 234 x 77.5mm (3.70 x 9.21 x 3.05")
IP Rating	54
Weight	470g (16.6oz)

BATTERY PIR

These battery powered sensors offer the same levels of protection as our MS-12 family, designed for compatibility with leading wireless systems.

TX-114TR	TX-114FR
12m (40ft) x 90°	12m (40ft) x 180°

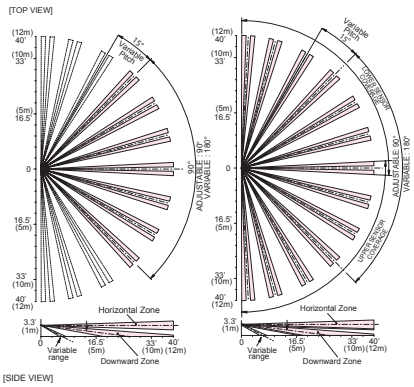

FEATURES

- Powered by 3V to 9VDC alkaline or lithium battery
- Dual-zone detection system
- 2 to 12m (6.6 to 40ft) coverage
- Rotating sensor heads (±90° horizontal adjustment)
- Compatible with numerous wireless transmitter units
- Back-box with 3-stage tamper: front, mid, and back
- IP54 housing

Model	TX-114TR	TX-114FR
Detection System	Passive infrared	
Operation	10VDC - 0.01A Max • Alarm output • Tamper output • Trouble output	
Supply Power	3V to 9V DC Alkaline or Lithium Battery	
Current Consumption	25µA	35µA
	5mA/3V (Test mode)	
Ambient Temperature	-4°F to +122°F (-20°C to +50°C)	
External Dimensions - WHD	91 x 245 x 116.5mm (3.58 x 9.65 x 4.59")	
IP Rating	54	
Weight	560g (19.8oz)	620g (21.9oz)

ROSARIO SEGURIDAD

HIGH PERFORMANCE PIR

Using the highest quality mirror-optics, these detectors have been designed for the most demanding environments where quality and reliability matter.

TX-114SR

12m (40ft) x 90°

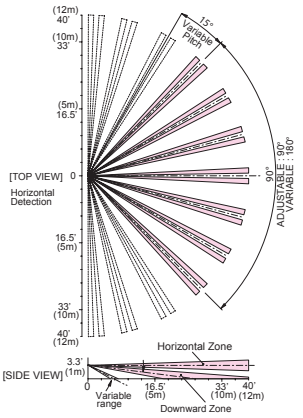

FEATURES

- Powered by 3V to 9VDC alkaline or lithium battery
- Dual-zone detection system
- 2 to 12m (6.6 to 40ft) coverage
- Rotating sensor head (±90° horizontal adjustment)
- Compatible with numerous wireless transmitter units
- IP54 housing

Detection System	Passive infrared: Twin
Operation	10VDC - 0.01A Max • Alarm output (Blue wires) • Tamper output (Green wires) • Trouble output
Supply Power	3V to 9V DC Alkaline or Lithium Battery
Current Consumption	25µA 5mA/3V (Test mode)
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
External Dimensions - WHD	80 x 234 x 88mm (3.15 x 9.21 x 3.46")
IP Rating	54
Weight	400g (14.1oz)

PIR-T15WE

15m (49ft) x 80°

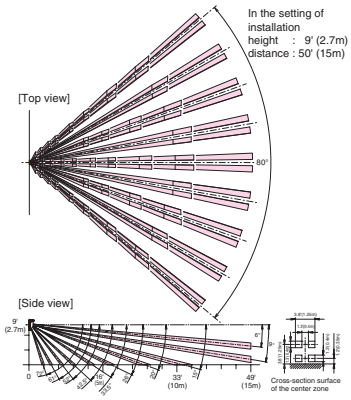

FEATURES

- 4 operation modes:
  Low Position, High Position, Pet Mode, High Density
- 2 to 6m (6.6 to 20ft) installation height
- High performance triple mirror optical system
- Precise LED detection area adjustment function
- Lightning surge protection
- IP55 housing

Detection System	Passive infrared (Triple mirror)
Alarm Output	Dry contact (semi-conductor) output N.C./N.O. 24V (AC/DC) 0.25A (resistive load)
Supply Voltage	9 to 28V DC (non-polarity)
Current Consumption	40mA. Max
Features	• External output • Sensitivity selection • Operation mode selection (4) • 2m to 6m Installation height • Lightning Protection • Pet immunity • Back tamper
Ambient Temperature	-25°C to +55°C (-13°F to +131°F)
Mounting Position	Indoor or Outdoor wall
IP Rating	55
Weight	600g (21.2oz)

PIR-T15AM

15m (49ft) x 80°

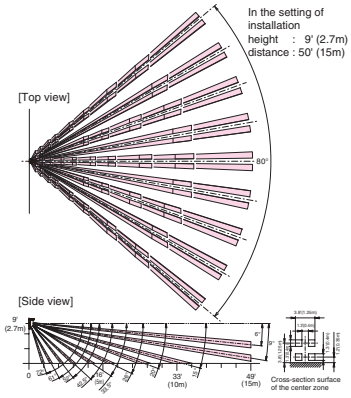

FEATURES

- Anti-masking function
- 4 operation modes:
  Low Position, High Position, Pet Mode, High Density
- 2 to 6m (6.6 to 20ft) installation height
- High performance triple mirror optical system
- Precise LED detection area adjustment function
- Lightning surge protection
- IP55 housing

Detection System	Passive infrared (Triple mirror)
Alarm Output	Dry contact (semi-conductor) output N.C./N.O. 24V (AC/DC) 0.25A (resistive load)
Supply Voltage	9 to 28V DC (non-polarity)
Current Consumption	Max. 50mA
Features	• External output • Sensitivity selection • Operation mode selection (4) • 2m to 6m Installation height • Lightning Protection • Pet immunity • Back tamper • Anti-masking
Ambient Temperature	-25°C to +55°C (-13°F to +131°F)
Mounting Position	Indoor or Outdoor wall
IP Rating	55
Weight	600g (21.2oz)

ROSARIO SEGURIDAD

PIR-30WE	PIR-50NE
30m (100ft) wide angle	50m (165ft) vertical curtain

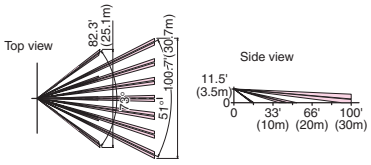

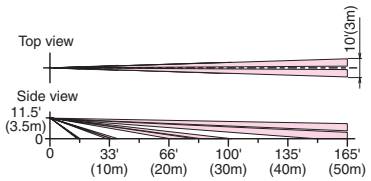

FEATURES

- High quality mirrored optics coupled with twin pyros
- Installation height 2 to 3.5m (6.6 to 11.5ft)
- Durable weatherproof AES resin housing
- Sensitivity adjustment from 30% to 170%
- Protective hood to deflect rain/sunlight and guard against wildlife

Detection System	Passive infrared
Alarm Output	Dry contact (semi-conductor) output: N.C./N.O. 24V (AC/DC) 0.25A (resistive load)
Supply Voltage	9 to 30V DC (non-polarity)
Current Consumption	30mA
Features	• Low supply voltage alarm • Tamper signal • LED control (L/C) • Alarm LED (ON/OFF) • Sensitivity adjust: 30-170%
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor or outdoor Wall
Optional	Water-proof grommet, Tapping screw
External Dimensions	184.5 dia. x 136mm (7.26 dia. x 5.36")
IP Rating	55
Weight	1.6kg (3.5lb)

MEDIUM RANGE PIR

For internal and external applications and featuring a unique bracket arrangement that allows for wall or ceiling mounting, orientated in any direction.

PA-15WE	PA-30NE
15m (50ft) wide angle	30m (100ft) long range

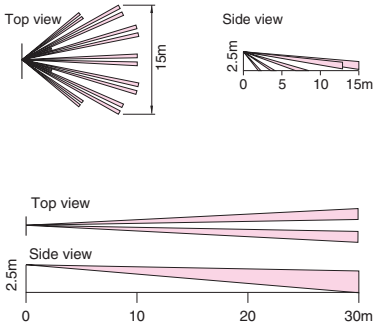

FEATURES

- Omni-directional bracket
- Can be mounted to ceiling, wall or pole
- Easy angle adjustment
- Weather resistant for indoor or outdoor use

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact relay output: 1c Reset time: approx 2sec. 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 30V DC (non-polarity)
Current Consumption	25mA
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor or Outdoor
Optional	Pole attachment, Vice attachment
External Dimensions	211 dia. x 72mm (8.30 dia. x 2.83")
IP Rating	43
Weight	500g (17.6oz)

MULTI-PATTERN PIR

Designed for outdoor and indoor use, the MS-100E offers the choice of wide angle, vertical and horizontal curtain, or long range detection from within a single discreet housing.

MS-100E
10m (33ft) wide / 10m (33ft) curtain / 20m (66ft) long

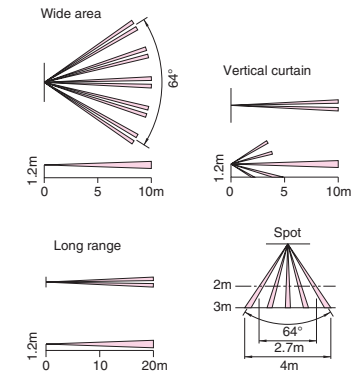

FEATURES

- Supplied with Wide Angle and Long Range lenses
- Choose from 4 detection patterns
- Can be mounted horizontally or vertically
- Sensor head rotates a full 180 degrees
- Weather resistant for indoor or outdoor use

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact relay output: N/C or N/O selectable Reset time: approx 2sec. 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 28V DC (non-polarity)
Current Consumption	30mA
Detection Area	Wide angle: 10m (33ft) Vertical curtain: 10m (33ft) Long range: 20m (66ft) Spot: 3m (10ft)
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Wall, Ceiling,Pole, Metal plate (Indoor, Outdoor)
Optional	Pole cover, Pole attachment, Wall mount bracket, Wall / Ceiling attachment, Magnetic sheet.
External Dimensions - WHD	77 x 171 x 70mm (3.03 x 6.73 x 2.76")
IP Rating	43
Weight	220g (7.8oz)

ROSARIO SEGURIDAD

CEILING MOUNT PIR

Whether you need simple 'spot' detection, 360° protection, curtain or wide angle coverage, Takex offer a comprehensive range of ceiling mount detectors for both domestic and industrial applications.

PA-6612E

12m (40ft) wide angle

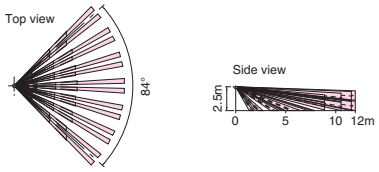

FEATURES

- Up to 4m (13ft) installation height
- Ceiling mount design
- Unique twin mirror and two twin pyro optic system
- Accurately detects human intrusion whilst rejecting nuisance alarms from small animals
- Geared mirror array for precise area definition
- Detachable base unit with snap-in/out sensor design
- Photo MOSFET relay for silent operation
- High RFI and EMI immunity

	Passive infrared (Twin x 2)
Alarm Output	Dry contact (semi-conductor) relay output N/O or N/C selectable Reset time: 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10.5V to 28V DC (non-polarity)
Current Consumption	25mA
Features	• Pulse count • LED control
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Ceiling, Wall (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions	120 dia. x 55mm (4.72 dia. x 2.16")
Weight	135g (4.8oz)

PA-6805E | PA-6810E

4m (13ft) spot | 15m (50ft) x 360°





FEATURES

- 2 to 4.9m (6.6 to 16ft) installation height
- Ceiling mount design
- Detachable base unit with snap-in/out sensor design
- Slim and compact 47mm (1.85") profile

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (Semi-conductor) output: N/C or N/O selectable Reset time: approx. 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10.5 to 28V DC (non-polarity)
Current Consumption	25mA: N/C
Features	• Alarm LED control • Pulse count
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Ceiling, Wall lindoor)
Optional	Ceiling / wall mount attachment
External Dimensions	120 dia. x 45mm (4.72 dia. x 1.85")
Weight	110g (3.9oz)

PA-6812E | PA-6820E

12m (40ft) wide angle | 20m (66ft) vertical curtain





FEATURES

- 2 to 4.9m (6.6 to 16ft) installation height
- Ceiling mount design
- Geared mirror array for precise area definition
- Detachable base unit with snap-in/out sensor design
- Slim and compact 47mm (1.85") profile

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (Semi-conductor) output: N/C or N/O selectable Reset time: approx. 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10.5 to 28V DC (non-polarity)
Current Consumption	25mA: N/C
Features	• Alarm LED control • Pulse count (PA-6812E only)
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Ceiling, Wall (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions	120 dia. x 45mm (4.72 dia. x 1.85")
Weight	110g (3.9oz)

ROSARIO SEGURIDAD

PA-8410E	PA-8420E
10m (33ft) wide angle	20m (66ft) vertical curtain





FEATURES

- 4 to 8m (13 to 26ft) installation height
- Ceiling mount design
- High-density detection area
- Mirror optics
- Durable weatherproof AES resin housing
- Photo MOSFET relay for silent operation

Detection System	Passive infrared
Alarm Output	Dry contact (semi-conductor) output: N.C./N.O. 24V (AC/DC) 0.25A (resistive load)
Supply Voltage	9 to 30V DC (non-polarity)
Current Consumption	30mA
Features	• Trouble alarm • Low supply voltage alarm • Tamper output • LED control • Area control • Alarm LED (ON/OFF) • Sensitivity adjust
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Mounting Position	Indoor or Outdoor Ceiling
Optional	Water-proof grommet, Tapping screw
External Dimensions	184.5 dia. x 136mm (7.26 dia. x 5.36")
IP Rating	55
Weight	950g (33.5oz)

PA-7012E	PA-7030E
12m (40ft) wide angle	30m (100ft) vertical curtain





FEATURES

- Dual element digital-quad sensor
- Ceiling mount design
- Original CPU architecture controls all functions including signal processing calculations
- Automatic sensitivity adjustment relative to ambient temperature
- Alarm memory function
- High RFI and EMI immunity
- Convenient twist-lock base for easy installation

Detection System	Passive infrared (Quad)
Alarm Output	Dry contact relay output: 1c Reset time: approx. 2sec. 30V (AC/DC) 0.1A Max
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	30mA
Features	• Alarm memory
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Ceiling, Wall (Indoor)
Optional	Flush mount attachment
External Dimensions	144 dia. x 92mm (5.67 dia. x 3.62")
Weight	330g (11.6oz)

PA-7100E
12m (40ft) x 360°

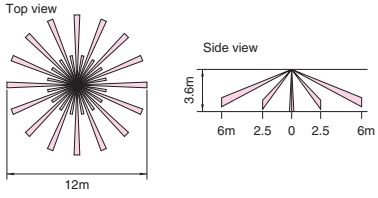

FEATURES

- Two dual element digital-quad sensors
- Ceiling mount design
- Original CPU architecture controls all functions including signal processing calculations
- Automatic sensitivity adjustment relative to ambient temperature
- Alarm memory function
- High RFI and EMI immunity
- Convenient twist-lock base for easy installation

Detection System	Passive infrared (Quad x 2)
Alarm Output	Dry contact relay output: 1c Reset time: approx. 2sec. 30V (AC/DC) 0.1A Max
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	30mA
Features	• Manual memory
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Ceiling (Indoor)
Optional	Flush mount attachment
External Dimensions	144 dia. x 92mm (5.67 dia. x 3.62")
Weight	330g (11.6oz)

ROSARIO SEGURIDAD

PA-5312E | PA-5325E

12m (40ft) wide angle | 25m (82ft) vertical curtain





FEATURES

- Quad PIR detector
- Ceiling mount design
- High performance dual twin element optical unit
- Original CPU architecture controls all functions including signal processing calculations
- High density detection area
- Slight motion detection with selectable twin/quad sensing
- Detachable base unit with snap-in/out sensor design
- Self-test function
- Built-in alarm memory
- Trouble alarm

Detection System	Passive infrared (Quad)
Alarm Output	Dry contact relay output: N/O or N/C selectable Reset time: approx. 2sec. 30V (AC/DC) 0.25A Max
Supply Voltage	9.5V to 30V DC (non-polarity)
Current Consumption	25mA
Features	• Fuzzy Logic • Trouble Output • Malfunction of equipment • Low voltage • Failure to replace • Alarm contact self-check
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Ceiling, Wall (Indoor)
Optional	Flush mount attachment, Level checker
External Dimensions	147.3 dia. x 59mm (5.80 dia. x 2.32")
Weight	250g (8.8oz)

PA-6412PI

12m (40ft) wide angle

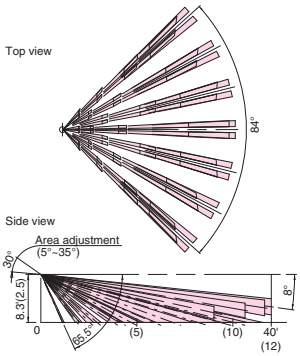

FEATURES

- 18kg (39.7lb) pet immunity
- Ceiling mount design
- Multiple zone technology
- Mirror optics
- Detachable base unit with snap-in/out sensor design
- Insect protection
- Photo MOSFET relay for silent operation

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (Semi-conductor) relay output: N/C or N/O selectable Reset time: approx. 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10 to 18VDC (non-polarity)
Current Consumption	25mA
Features	• Pulse count • LED disable switch • Low voltage alarm
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Indoor Ceiling
Optional	Ceiling / wall mount attachment
External Dimensions	147 dia. x 60mm (5.79 dia. x 2.36")
Weight	160g (5.6oz)

PA-370

6.7m (22ft) wide / narrow curtain





FEATURES

- Up to 5m mounting height
- Ceiling mount design
- Interchangeable lenses

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (semi-conductor) relay output: N/O or N/C selectable Reset time: 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10 to 18V DC (non-polarity)
Current Consumption	25mA
Features	• Pulse count • LED disable switch • Low voltage alarm • Auto reset memory
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Ceiling, Wall (Indoor)
Optional	Ceiling / wall mount attachment, Line protection lens
External Dimensions	120 dia. x 45mm (4.72 dia. x 1.85")
Weight	120g (4.2oz)

ROSARIO SEGURIDAD

PA-450E

11m (36ft) wide angle

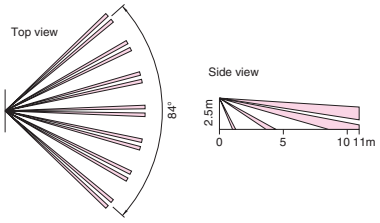

FEATURES

- Wall mount design
- Adjustable coverage to suit different mounting heights
- Creep zone eliminates dead-space below sensor
- Equipped with tamper and auto-reset memory
- Mode selector for easy setting adjustment
- High RFI and EMI immunity
- Photo MOSFET relay for silent operation

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (semi-conductor) relay output: N/O or N/C selectable Reset time: 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	25mA
Features	• Pulse count • LED disable switch • Low voltage alarm • Auto reset memory
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Wall, Wall corner (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions - WHD	70 x 110 x 45mm (2.76 x 4.33 x 1.77")
Weight	120g (4.2oz)

PA-450PI

11m (36ft) wide angle

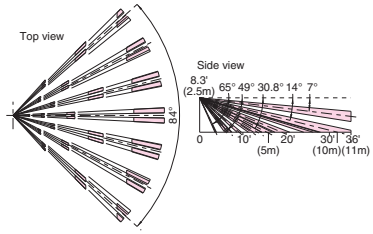

FEATURES

- 20kg (44.1lb) pet immunity
- Wall mount design
- Adjustable coverage to suit different mounting heights
- Equipped with tamper and auto-reset memory
- Mode selector for easy setting adjustment
- High RFI and EMI immunity
- Photo MOSFET relay for silent operation

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (semi-conductor) relay output: N/O or N/C selectable Reset time: 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	25mA
Features	• Pulse count • LED disable switch • Low voltage alarm • Auto reset memory
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Wall, Wall Corner (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions - WHD	70 x 110 x 45mm (2.76 x 4.33 x 1.77")
Weight	120g (4.2oz)

PA-460E

16.5m (54ft) vertical curtain

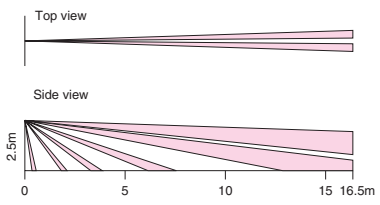

FEATURES

- Wall mount design
- Adjustable coverage to suit different mounting heights
- Creep zone eliminates dead-space below sensor
- Equipped with tamper and auto-reset memory
- Photo MOSFET relay for silent operation

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact (semi-conductor) relay output: N/O or N/C selectable Reset time: 2sec. 24V (AC/DC) 0.25A Max
Supply Voltage	10 to 18V DC (non-polarity)
Current Consumption	25mA
Features	• LED disable switch • Low voltage alarm • Auto reset memory
Ambient Temperature	-15°C to +55°C (+5°F to +131°F)
Mounting Position	Wall, Wall Corner (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions - WHD	70 x 110 x 45mm (2.76 x 4.33 x 1.77")
Weight	120g (4.2oz)

ROSARIO SEGURIDAD

PA-470L

16m (52ft) wide angle / 20m (66ft) vertical curtain

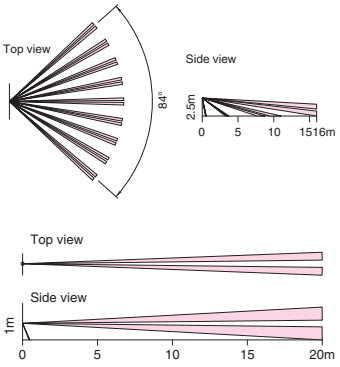

FEATURES

- Wall mount design
- Quad element with fuzzy logic processing system
- Pattern selectable with interchangeable lenses
- Low voltage trouble output
- Alarm memory function

Detection System	Passive infrared (Quad)
Alarm Output	Dry contact relay output: N/C or N/O (changeover on switch) Reset time: approx. 2sec. 30V (AC/DC) 0.25A Max
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	28mA
Features	• Memory control • LED control • Low voltage
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Wall, Wall Corner (Indoor)
Optional	Ceiling, wall mount attachment
External Dimensions - WHD	90 x 127 x 62.5mm (3.54 x 5.00 x 2.46")
Weight	165g (5.8oz)

PA-480S

8m (26ft) x 180°



FEATURES

- Wall mount design
- Twin element with pulse count
- Low voltage trouble output
- Alarm memory function

Detection System	Passive infrared (Twin)
Alarm Output	Dry contact relay output: N/C Reset time: approx. 2sec. 30V (AC/DC) 0.1AMax
Supply Voltage	9 to 18V DC (non-polarity)
Current Consumption	32mA
Features	• Low voltage alarm • Area adjustment (downward 5 positions)
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Wall, Wall Corner (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions - WHD	90 x 127 x 62.5mm (3.54 x 5.00 x 2.46")
Weight	165g (5.8oz)

PA-4810E / PA-4820E

12m (40ft) wide angle / 25m (82ft) vertical curtain

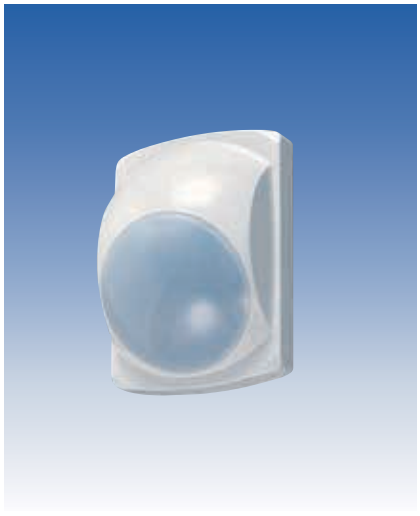





FEATURES

- Wall mount design
- Quad element with fuzzy logic processing system
- Mirror optics
- Slight motion detection with selectable twin/quad sensing
- Low voltage trouble output
- Alarm memory function

Detection System	Passive infrared (Quad)
Alarm Output	Dry contact relay output: N/C or N/O (changeover on switch) Reset time: approx. 2sec. 30V (AC/DC) 0.25A Max
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	32mA
Features	• Slight motion detection • Memory control LED control • Trouble alarm
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Wall, Wall Corner (Indoor)
Optional	Ceiling / wall mount attachment
External Dimensions - WHD	90 x 127 x 60mm (3.54 x 5.00 x 2.36")
Weight	165g (5.8oz)

ROSARIO SEGURIDAD



BCW-401
Wall/ceiling attachment
For:
- MS-100E + BW-14



BL-8400
Wall mount attachment
For:
- PIR-30WE/50NE
- PA-8410E/8420E

BP-01
Pole attachment
For:
- PA-15WE/PA-30NE



BP-02
Pole attachment
For:
- PIR-T15WE/AM
- PA-15WE/PA-30NE



BP-03
Pole attachment
For:
- PIR-30WE/50NE
- PA-8410E/8420E

BP-11
Pole cover
For:
- MS-100E

BP-12
Pole attachment kit
For:
- MS-100E

BP-22
Pole attachment kit
For:
- MS-12TE/FE
- TX-114SR
- PIR-T15WE/AM

BP-22F
Pole attachment clamps
For:
- PIR-T15WE/AM



BP-32
Pole attachment
For:
- OMS-12FE
- TX-114TR/FR

BR-M5
Magnetic sheet
For:
- MS-100E + BW-14

BU-8400
Embedding attachment
For:
- PA-8410E/8420E

BV-03
Vice attachment
For:
- PA-15WE/PA-30NE

BW-14
Wall mount bracket
For:
- MS-100E

BW-24
Wall mount bracket
For:
- MS-12TE/FE
- TX-114SR
- PIR-T15WE/AM

KP-32
Ceiling attachment
For:
- PIR-T15WE/AM + BP-22F



MS-LENS-WHITE
White lens
For:
- MS-12TE/FE
- TX-114FR/TR
- TX-114SR

WO-3D
Wall bracket
For:
- PIR-30WE/50NE + BL-8400

BCW-401
Wall/ceiling attachment
For:
- PA-450E/450PI/460E
- PA-470L/480S
- PA-6612E
- PA-6805/6810/6812/6820E

BL-5000
Wall mount attachment
For:
- PA-6612E
- PA-6805/6810/6812/6820E
- PA7012/7030/7100E
- PA-5312/5325E
- PA-6412PI

BU-5300/6800/7000
Flush mount attachment
For:
- PA-5312/5325E
- PA-6805/6810/6812/6820E
- PA7012/7030/7100E

TX-102R BASE BOX
Surface mounted base for interface modules
For:
- PA-6805/6810/6812/6820E

ROSARIO SEGURIDAD

INDOOR FLAME SENSORS

With faster detection than conventional smoke alarms, our Ultra-Violet (UV) flame sensors are practical where smoke detection is not an option, such as diesel engine rooms and open environments.

FS-1000E

10m (33ft) / 7cm (2.76") flame



FEATURES

- High sensitivity ultraviolet flame sensor
- Built-in sounder
- NO/NC relay output
- Adjustable response time
- Battery or DC operation

Detection System	Ultraviolet rays detection
Detection Distance	7cm (2.75") gas/lighter flame at 10m (33ft)
Supply Voltage	Type AA Alkaline battery (LR-6) x 2 External wiring 9 to 30V DC
Current Consumption	50mA
External Output	Open collector (semi-conductor) output N/O 30V DC • 50mA Max Delay time (approx. 10sec)
Mounting Position	Ceiling, wall (indoor)
External Dimensions	120 dia x 40mm (4.72" dia x 1.57")
Weight	200g (7.05oz)

FS-2000E

10m (33ft) / 7cm (2.76") flame



FEATURES

- High sensitivity ultraviolet flame sensor
- Adjustable detection area
- Built-in sounder
- NO/NC relay output
- Adjustable response time

Detection System	Ultraviolet rays detection
Detection Distance	7cm (2.75") gas/lighter flame at 10m (33ft)
Supply Voltage	10 to 30V DC (non-polarity)
Current Consumption	Stand-by: 25mA or less Alarm: 75mA or less with buzzer 40mA or less without buzzer
External Output	Dry contact relay output form C Contact action time Min. 2sec. Contact capacity: 30V (AC/DC) 0.3A
Mounting Position	Ceiling, wall (indoor)
External Dimensions	120 dia x 40mm (4.72" dia x 1.57")
Weight	150g (5.29oz)

FS-3500E

10m (33ft) / 7cm (2.76") flame



FEATURES

- High sensitivity ultraviolet flame sensor
- Prerecorded flame prohibition and non-smoking messages
- Choose between long and short message options
- English, Spanish, Japanese, Chinese, Korean languages
- 80dM/1m (3.3ft) max
- NO/NC relay output
- Adjustable response time
- Battery or DC operation

Detection System	Ultraviolet rays detection
Detection Distance	7cm (2.75") gas/lighter flame at 10m (33ft)
Supply Voltage	Type AA Alkaline battery (LR6) x 2 (not included) External wiring 10 to 30V DC (Polarized)
Current Consumption	Stand by: 40mA or less Alarm: 300mA or less
Battery Life	Type-AA alkaline battery: Approx. 2 years (Stand by)
Warning Message	"Japanese" "English" "Chinese" "Korean" "Spanish"
External Output	Relay contact output N.O./N.C. Detection time plus 2 sec. Output 30V DC 0.1 A
Mounting Position	Indoor
Weight	180g (6.35oz) (battery excluded)

ROSARIO SEGURIDAD

FS-5000E

10m (33ft) / 7cm (2.76") flame

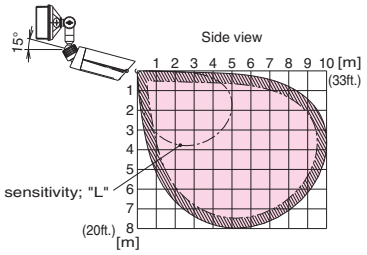

FEATURES

- High sensitivity ultraviolet flame sensor
- Omni-directional bracket
- Weather proof housing for indoor or outdoor use
- NO/NC relay output
- Adjustable response time

Detection System	Ultraviolet rays detection
Detection Distance	7cm (2.75") gas/lighter flame at 10m (33ft)
Supply Voltage	10 to 30V DC (Non-polarity)
Current Consumption	35mA or less
External Output	Dry contact relay Form C Contact capacity: 30V (AC/DC) 0.5A or less
Ambient Temperature	-20°C to +50°C (-4°F to +122°F)
Installation	Outdoor, Indoor
IP Rating	43
Weight	550g (19.4oz)

TX-124R

10m (33ft) / 7cm (2.76") flame

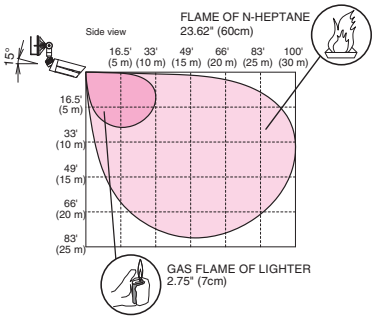

FEATURES

- High sensitivity ultraviolet flame sensor
- Powered by DC3V (CR-123A) battery
- Compatible with leading wireless transmitter models
- H/L sensitivity settings and 4-stage detection timer
- Omni-directional bracket
- Weather proof housing for indoor or outdoor use
- NO/NC relay output
- Adjustable response time

Detection System	Ultraviolet rays detection
Detection Distance	7cm (2.75") gas/lighter flame at 10m (33ft) 60cm (23.62") Flame of n-heptane on fire plate 15 x 15cm (5.91 x 5.91") at 30m (100ft) *The flame size is approximate.
Supply Voltage	(Red/Black wires) 3V DC (CR-123A)
Current Consumption	Standby: 55μA Max, Detection: 5mA Max
Detection Output	(Blue/White wires) Solid State Switch N.C 3VDC • 0.01A Max Output when detecting Ultraviolet, Real time + delay time 2 sec
Ambient temperature	-20°C to +50°C (-4°F to +122°F)
IP Rating	43
Weight	510g (18.0oz)

TX-102R BASE BOX

Surface mounted base for interface modules

For:

- FS-1000E
- FS-2000E
- FS-3500E

Takex Glass break sensors use Ultrasound to detect cutting as well as breaking glass. The advantage of this device is nothing has to be fitted on the glass itself, and it is possible to cover numerous panes with just one device.

GS-1100E

7m (23ft) x 8m (26ft)



FEATURES

- Ulltrasonic type
- Wall mount design
- Easy installation
- Alarm/environmental LED operation check
- Alarm memory function
- Sensitivity adjustment
- Slim and compact 32mm (1.26") profile

Detection System	Ultrasonic
Alarm Output	Dry contact relay output: N/C Reset time: approx. 2sec 30V (AC/DC) 0.1 A Max
Supply Voltage	9 to 20V DC (non-polarity)
Current Consumption	30mA
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Wall (indoor)
Optional	Glass checker
External Dimensions -WHD	70 x 110 x 32mm (2.75 x 4.33 x 1.26")
Weight	120g (4.23oz)

GS-02 / GS-02C

GS-02	GS-02C
straight cord	curled cord



FEATURES

- 180cm (6ft) coverage radius
- Piezoelectric type
- Memory reset function

Detection System	Piezoelectric type
Alarm Output	Dry contact relay output: N/C Reset time: approx. 2sec 30V (AC/DC) 0.5A Max
Supply Voltage	10.5 to 15V DC (non-polarity)
Current Consumption	20mA
Features	Memory reset
Ambient Temperature	-30°C to +55°C (-22°F to +131°F)
Mounting Position	Surface of glass (indoor)
Optional	Glass checker, Glue
External Dimensions	37.0 dia x 15mm (1.46 dia x 0.6")
Weight	GS-02: 30g (1.06oz) GS-02C: 50g (1.76oz)

EG-2000
Operation checker
For:
- GS-1100E



KE-347T
Adhesive
For:
- GS-02/02C

ROSARIO SEGURIDAD

AUTO DOOR SENSORS

Takex Auto Door sensors use NIR (Near Infrared Reflection) technology, providing the most stable detection method for this application, and allowing continual monitoring of stationary people/objects within the entire coverage area.

DA-101E

4m (13ft) width @ H3m (10ft)

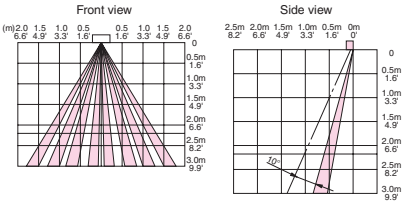

FEATURES

- Auto door sensor
- Near infrared beam type
- 4-step stationary detection
- 4 selectable channels to prevent crosstalk
- Excellent external light immunity
- Slim and compact 30mm (1.18") profile
- Suitable for AC/DC operation

Detection System	Near infrared beam direct reflection
Max Installation Height	3m (9ft 10")
Area Adjustable Angle	Main body adjustable angle: 0° to +10° Depth: 1 line Width: adjustable by area switch
Power Supply	12 to 110V AC or DC± 10%
Current Consumption	1.8VA or less at 100V AC 1.0VA or less at 12V AC 80mA or less at 12V DC 1.3VA or less at 24V AC 40mA or less at 24V DC
External Output	Dry contact relay N/O. 50V DC 0.1A or less
Output Holding Time	Approx. 0.5 seconds
Stationary Detection Time	2, 15, 60 and 180sec. selectable by dip switch
Ambient Temperature	-20°C to +60°C (-4°F to +140°F)
External Dimensions - WHD	212 x 65 x 35mm (8.35 x 2.56 x 1.38")
Weight	190g (6.70oz)

DA-303S

3m (10ft) width @ H3m (10ft)

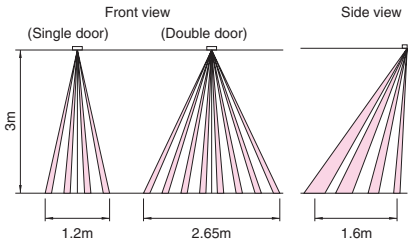

FEATURES

- Auto door sensor
- Near infrared beam type
- High-density detection pattern
- Easily disable rows to meet any detection requirement
- Adjustable pattern width (for single/double doors)
- 4-step stationary detection (inc. infinite)
- 4 selectable channels to prevent crosstalk
- 4 selectable environment sensitivity settings
- Slim and compact 28mm (1.10") profile
- Suitable for AC/DC operation

Detection System	Near infrared beam direct reflection
Max Installation Height	3m (9ft 10")
Area Adjustable Angle	Main body adjustable angle: 0° to +5° Depth: 1 line to 4 lines Width: Adjustable by switch
Power Supply	12 to 110V ±10% 50/60Hz
Current Consumption	AC100V: 2.4VA, AC12V: 1.7VA, AC24V: 1.7VA, DC12V: 40mA, DC12V: 80mA
External Output	Dry contact relay N/O. 50V DC 0.1A or less
Output Holding Time	Approx. 0.5 seconds
Stationary Detection Time	2, 10, 60sec. and ∞ selectable by dip switch
Ambient Temperature	-20°C to +60°C (-4°F to +140°F)
External Dimensions - WHD	210 x 59 x 28mm (8.27 x 2.32 x 1.10")
Weight	180g (6.35oz)

REQUEST-TO-EXIT

The PS-520E Request-to-Exit (REX) unit uses Passive Infrared detection, combined with adjustable mirrored optics.

PS-520E

2.4m (8ft) width @ H4m (13ft)

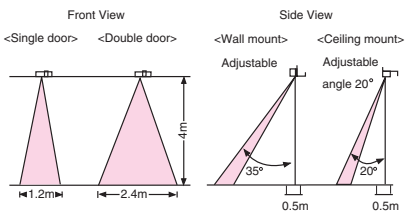

FEATURES

- Request-to-Exit sensor
- Passive infrared type
- Adjustable pattern width (for single/double doors)
- 2 x heavy duty relay outputs (up to 1A) for controlling door strikes and magnetic locks
- Fail safe/fail secure selectable
- Adjustable relay timer 0.25 to 60 seconds
- Dual pyro for increased external light immunity

Detection System	Passive Infrared
Alarm Output	Dry contact relay output: 2c Hold time: Adjustable approx. 0.25sec to 60sec 30V (AC/DC) 1A
Supply Voltage	12 to 24V DC
Current Consumption	40mA/DC 70mA/AC
Ambient Temperature	-10°C to +50°C (+14°F to +122°F)
Mounting Position	Wall, Ceiling (indoor)
External Dimensions - WHD	160 x 60 x 40mm (6.30 x 2.36 x 1.57")
Weight	170g 6.0oz)

ROSARIO SEGURIDAD

AV-100E

N/O input for activation



FEATURES

- Requires external trigger for activation (N/O input)
- Record a message (8 secs) using built-in microphone
- Omni-directional bracket
- Memory back-up for 20 days without power
- Horn speaker type
- 100dB/1m (3.3ft) max

Supply Voltage	12V DC
Voice Output	2W Max
Alarm Input	Dry contact N/O
External Dimensions - WHD	115 x 172 x 289mm (4.53 x6.77 x11.38")
Weight	1.0kg (2.2lb)

PV-12

12m (40ft) x 75°

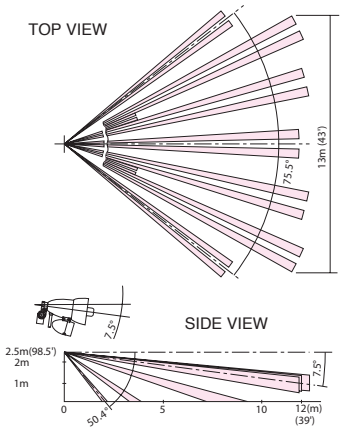

FEATURES

- Integrated PIR triggers activation
- Alarm output
- Record a message (8 secs) using built-in microphone
- Omni-directional bracket
- Memory back-up for 20 days without power
- Horn speaker type
- 100dB/1m (3.3ft) max

Detection System	Passive infrared
Coverage Area	Wide angle protection Coverage 12m (39ft 4") max.
Supply Voltage	12V DC
Voice Output	2W
Alarm Output	Dry contact relay output: 1c Reset time: approx. 8 sec 30V (AC/DC) 0.5A
External Dimensions - WHD	115 x 172 x 289mm (4.53 x6.77 x11.38")
Weight	1.0kg (2.2lb)

PVW-12TE

12m (40ft) x 90°

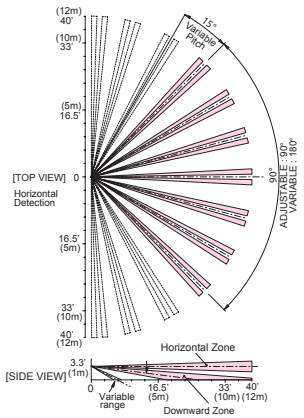

FEATURES

- Dual-zone detection system
- 2 recordable messages (daylight or arm/disarm)
- Built-in microphone and audio line input
- DAY/NIGHT sensing

Detection System	Passive infrared
Coverage Area	Horizontal coverage Max. detection distance 12m (39ft 4") Detection angle 90‘
Supply Voltage	10 to 30V DC
Current Consumption	55mA Max. for standby 300mA Max. for operation
Alarm Output	Dry contact relay output NO/NC selectable with a switch Contact capacity: 30V (AC/DC), 0.5A Max. Contact operation: One shot operation Approx. 2 sec.
External Dimensions - WHD	80 x 234 x 91mm (3.15 x 9.21 x 3.58")
Weight	480g (1.0lb)

ROSARIO SEGURIDAD

A
AV-100E 26

B
BA-6SLA 12
BCW-401 21
BH-200 12
BL-10 12
BL-11 12
BL-5 12
BL-5000 21
BL-8400 21
BP-01 21
BP-02 21
BP-03 21
BP-11 21
BP-12 21
BP-200F 12
BP-200X 12
BP-22 21
BP-22F 21
BP-32 21
BP-5B 12
BP-5C 12
BP-5D 12
BP-60A 12
BP-60TE 12
BR-10 12
BR-5 12
BR-M5 21
BS-50F 12
BS-50X 12
BU-50F 12
BU-5300 21
BU-6800 21
BU-7000 21
BU-8400 21
BV-03 21
BW-14 21
BW-24 21

D
DA-101E 25
DA-303S 25

E
EG-2000 25
ER-02 12

F
FS-1000E 22
FS-2000E 22
FS-3500E 22
FS-5000E 23

G
GS-02 24
GS-02C 24
GS-1100E 24

H
HTF-24AE 12
HTF-24E 12

I
INT-QUADIP 10

K
KE-347T 24
KP-32 21

M
MS-100E 15
MS-12FE 13
MS-12TE 13
MS-LENS-WHITE 21

O
OMS-12FE 13

P
PA-15WE 15
PA-30NE 15
PA-370 18
PA-450E 19
PA-450PI 19
PA-460E 19
PA-470L 20
PA-480S 20
PA-4810E 20
PA-4820E 20
PA-5312E 18
PA-5325E 18
PA-6412PI 18
PA-6612E 16
PA-6805E 16
PA-6810E 16
PA-6812E 16
PA-6820E 16
PA-7012E 17
PA-7030E 17
PA-7100E 17
PA-8410E 17
PA-8420E 17
PB-100AT-KH 06
PB-100FA 04
PB-100HF/A-KH 06
PB-100ST 07
PB-100TK 07
PB-10NS 10
PB-10TNS 10
PB-200FA 04
PB-200HF/A-KH 06
PB-20TE 07
PB-30TK 07
PB-40TE 07
PB-50FA 04
PB-50HF/A-KH 06
PB-60TE 07
PB-60TK 07
PB-IN-100AT 04
PB-IN-100HFA 03
PB-IN-200HFA 03
PB-IN-50HFA 03
PBH 12
PH-200SE 08
PH-600SE 08
PIR-30WE 15
PIR-50NE 15
PIR-T15AM 14
PIR-T15WE 14
PR-10B 09
PR-10BU 09
PR-11BE 09
PR-1B 08
PR-5B 09
PS-520E 25
PTS 12
PV-12 26
PVW-12TE 26
PXB-100ATC 04
PXB-100ATC-KH 06
PXB-100F 03
PXB-100HF 03
PXB-100HF-KH 05
PXB-100SW 08
PXB-200F 03
PXB-200HF 03
PXB-200HF-KH 05
PXB-50F 03
PXB-50HF 03
PXB-50HF-KH 05

T
TA-PSU2A 12
TAD100 11
TAD150 11
TAD200 11
TAD300 11
TADTOP 12
TAFB 12
TAH 12
TAKH 12
TANCK 12
TAPS 12
TAS100 11
TAS150 11
TAS200 11
TAS300 11
TASTOP 12
TAW100 11
TAW150 11
TAW200 11
TAW300 11
TC100 12
TC150 12
TC200 12
TC300 12
TX-102R BASE BOX 21
TX-114FR 13
TX-114SR 14
TX-114TR 13
TX-124R 23
TXF-125E 05
TXF-125E-KH 05

W
WO-3D 21

NOTES

ROSARIO SEGURIDAD

TAKEX EUROPE LTD.

Europe, Middle East & Africa
Aviary Court, Wade Road
Basingstoke, Hampshire RG24 8PE
United Kingdom
tel: +44 (0) 1256 475555
fax: +44 (0) 1256 466268
www.takex.com

TAKEX AMERICA INC.

North America
151 San Zeno Way
Sunnyvale, CA 94086
USA
tel: +1 408 747 0100
fax: +1 408 734 1100
www.takex.com

Australia
4/15 Howleys Road
Notting Hill, VIC 3168
Australia
tel: +61 (3) 9544 2477
fax: +61 (3) 9543 2342
www.takex.com

TAKENAKA ENGINEERING CO., LTD.

Asia
83-1, Gojo-sotokan-nishi, Higashino
Yamashina-ku, Kyoto 607-8156
Japan
tel: +81 75 501 6651
fax: +81 75 593 3816
www.takex-eng.co.jp

TE 6112

ROSARIO SEGURIDAD