

## DS-D5027FN 27" LED Monitor



The Hikvision DS-D5027FN 27-inch LED Monitor provides a full HD 1920 x 1080 image. It is built for full-time 24/7 operation and provides HDMI and VGA inputs.

**Available Models:**


DS-D5027FN

- LED Backlit Technology with Full HD 1920×1080
- Wide View Angle: 178° (H)/178° (V)
- User-Friendly Operation Menu
- Highly Reliable Components for 7 x 24 Use
- 1 Channel HDMI 1.3 Input Interface
- Three Image Modes for Different Environments
- Spread-Spectrum Technology Reduces EMI Radiation
- VESA Stand

# Specifications

DS-D5027FN	
<b>LCD Screen</b>	
Backlight	TFT-LED backlight
Dimension (Diagonal)	27 inches
Optimal Working Resolution	1920 × 1080 @ 60 Hz
Brightness	300 cd/m <sup>2</sup>
Contrast	1000:1
Response Time	14 ms
Colors	16.7 M
Active Area	598 mm × 336 mm
Viewing Angle	Horizontal 178°, vertical 178°
<b>Interfaces</b>	
VGA Input	1
HDMI Input	1
<b>General</b>	
Casing Material	Plastic
Casing Color	Black
Wall-Mounting Hole	100 mm × 100 mm
Wall-Mounting Screw	M4
Speakers	NA
Power Supply	100 to 240 VAC, 50/60 Hz
Power Consumption	≤40 W
Standby Power Consumption	≤0.5 W
Working Temperature	32° to 104° F (0 to 40° C)
Working Humidity	10% to 90% non-condensing
Storage Temperature	-4° to 140° F (-20° to 60° C)
Storage Humidity	5% to 95% non-condensing
Dimensions	614 mm × 454 mm × 226 mm
Packing Dimensions	675 mm × 547 mm × 136 mm
Gross Weight	12.39 lbs [5.62 kg]
Net Weight	8.95 lbs [4.06 kg]


# Dimensions

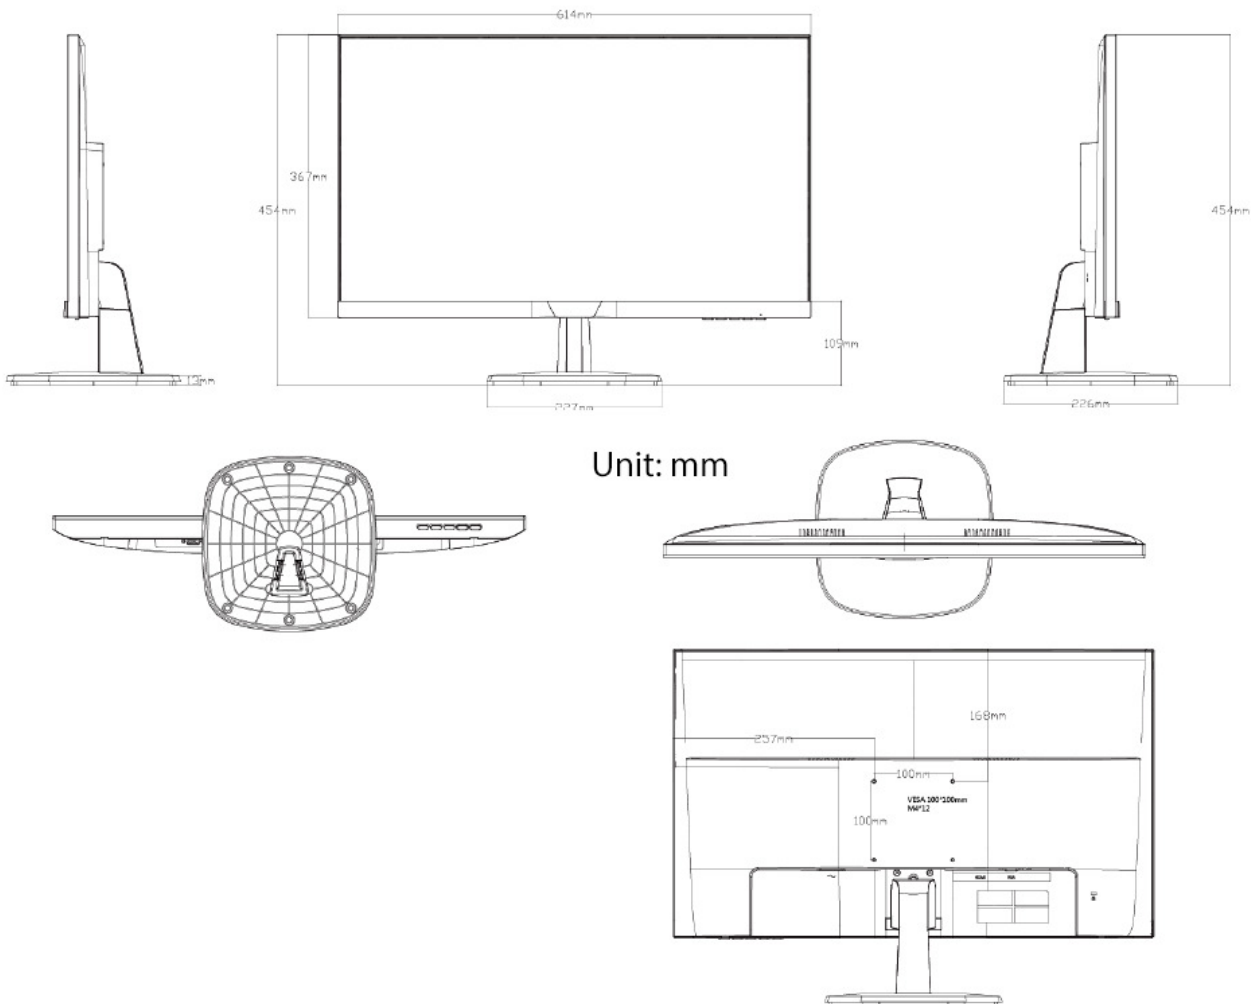

Unit: mm

## Physical Interfaces

---

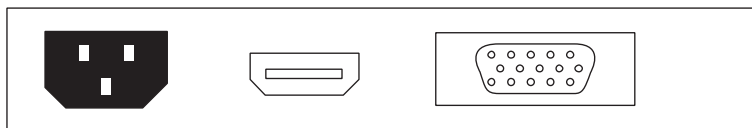

①

②

③

No.	Description
①	AC Input
②	HDMI Input
③	VGA Input

## Box Contents (Subject To Change without Notice)


---

VGA Cable

VESA Stand

Power Cord

User Manual


✉ [ventas@rosarioseguridad.com.ar](mailto:ventas@rosarioseguridad.com.ar)  [rosarioseguridadok](https://www.instagram.com/rosarioseguridadok)


 +54 9 341 6708000  [Rosario Seguridad](https://www.youtube.com/channel/UC...)

 +54 9 341 6799822  [Rosario Seguridad](https://www.facebook.com/RosarioSeguridad)

Grupo Instaladores

 <https://www.facebook.com/groups/591852618012744/>

 +54 9 341 6591429

 +54 9 341 4577532

**Avenida Presidente Perón 3998 - Rosario - Santa Fe - Argentina**